



FINE FLOORING AND DECOR WORKS

PREMIUM CARPET TILE COLLECTION 2026


Premium Flooring Solutions for Luxury Spaces

2026 EDITION







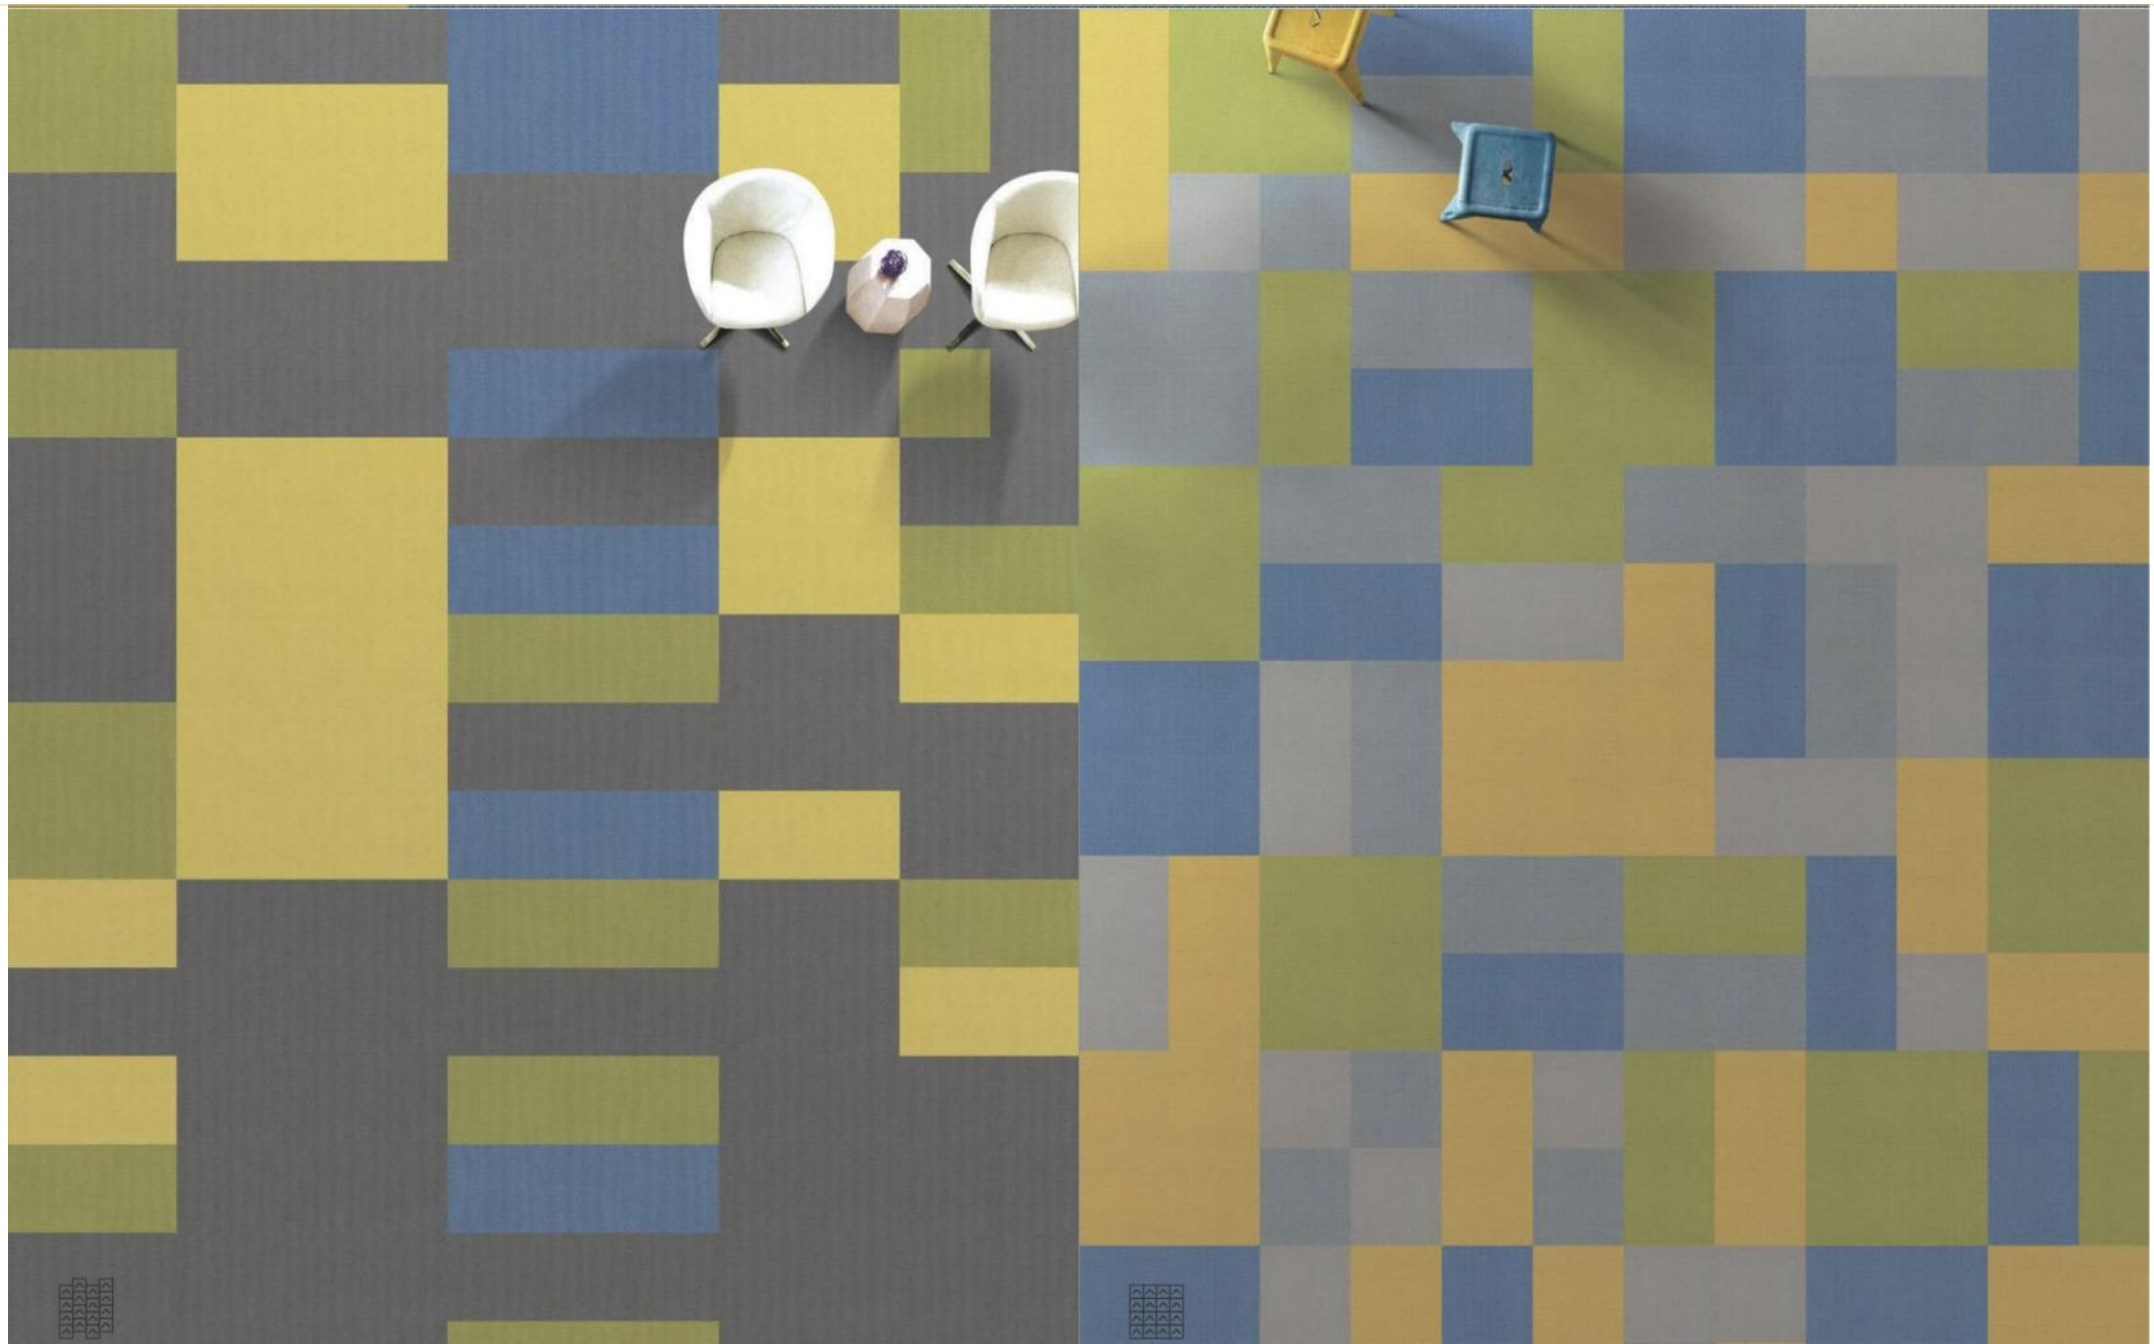









Specification

Name: QC
 Face Fiber: 100%Nylon 6
 Backing: PVC+Fiber glass
 Gauge: 1/12
 Stitches per cm: 40 per 10cm
 Pile Weight: 535g/m²
 Pile Height: 2.5-5mm

Total Height: 7mm
 Product Size: 50x50 cm
 Antimicrobial: PASS AATCC TM 174
 Radiant panel: (ASTM E 648) CLASS I
 Nbs smoke: (ASTM E 648) less than 450
 Electrostatic propensity: less than 3.5KV









Serene

Sedimentation of tired thoughts and expression of unrestrained imagination and artistic conception are all flying and spreading freely here one by one.







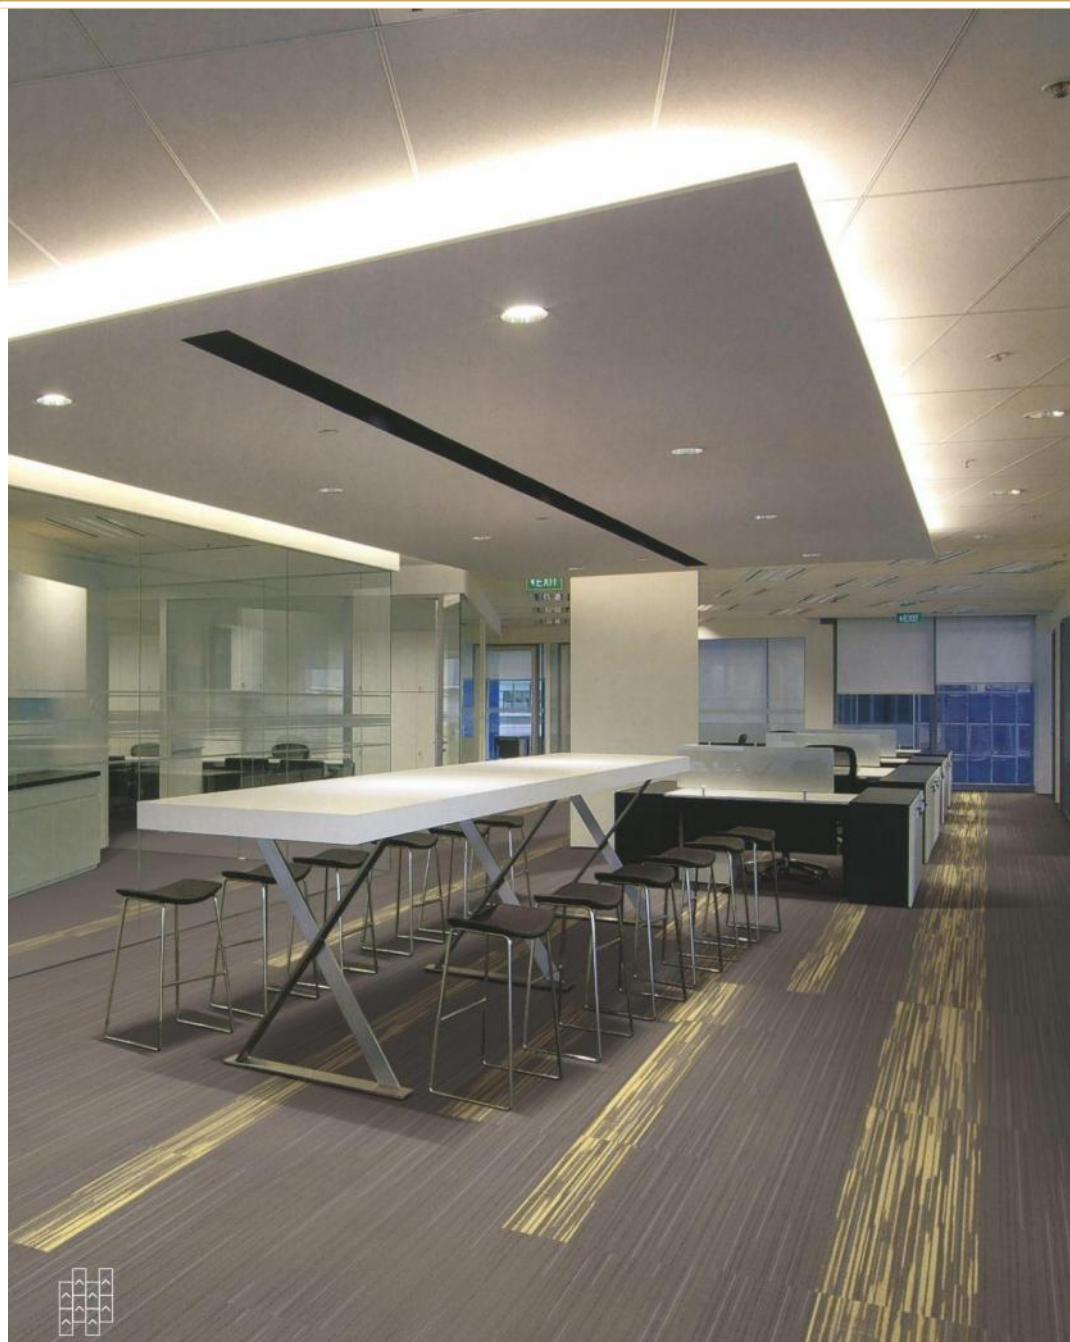



Modest Luxury









Specification

Name: YJ
Face Fiber: 100%Nylon 6
Backing: PVC+Fiber glass
Gauge: 1/12
Stitches per cm: 40 per 10cm
Pile Weight: 580g/m²
Pile Height: 2.5-5mm
Total Height: 7mm
Product Size: 18x36 in
Antimicrobial: PASS AATCC TM 174
Radiant panel: (ASTM E 648) CLASS I
Nbs smoke: (ASTM E 648) less than 450
Electrostatic propensity: less than 3.5KV



YJ-00232211 A



YJ-00232211 B



YJ-00232212 A



YJ-00232212 B



YJ-00232222 A



YJ-00232222 B



YJ-00232231 A



YJ-00232231 B



YJ-00232213 A



YJ-00232213 B



YJ-00232214 A



YJ-00232214 B



YJ-00232232 A



YJ-00232232 B



YJ-00232251 A



YJ-00232251 B



YJ-00232215 A



YJ-00232215 B



YJ-00232221 A



YJ-00232221 B



YJ-00232252 A




YJ-00232252 B



YJ-00232281 A



YJ-00232281 B

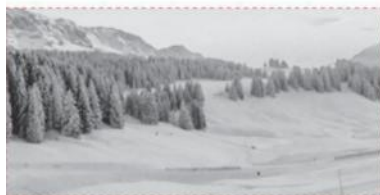














Specification

Name: TX
 Face Fiber: 100% Nylon 6
 Backing: PVC+Fiber glass
 Gauge: 1/12
 Stitches per cm: 40 per 10cm
 Pile Weight: 620g/m²
 Pile Height: 2.5-5mm
 Total Height: 7mm
 Product Size: 25x100 cm
 Antimicrobial: PASS AATCC TM 174
 Radiant panel: (ASTM E 648) CLASS I
 Nbs smoke: (ASTM E 648) less than 450
 Electrostatic propensity: less than 3.5KV

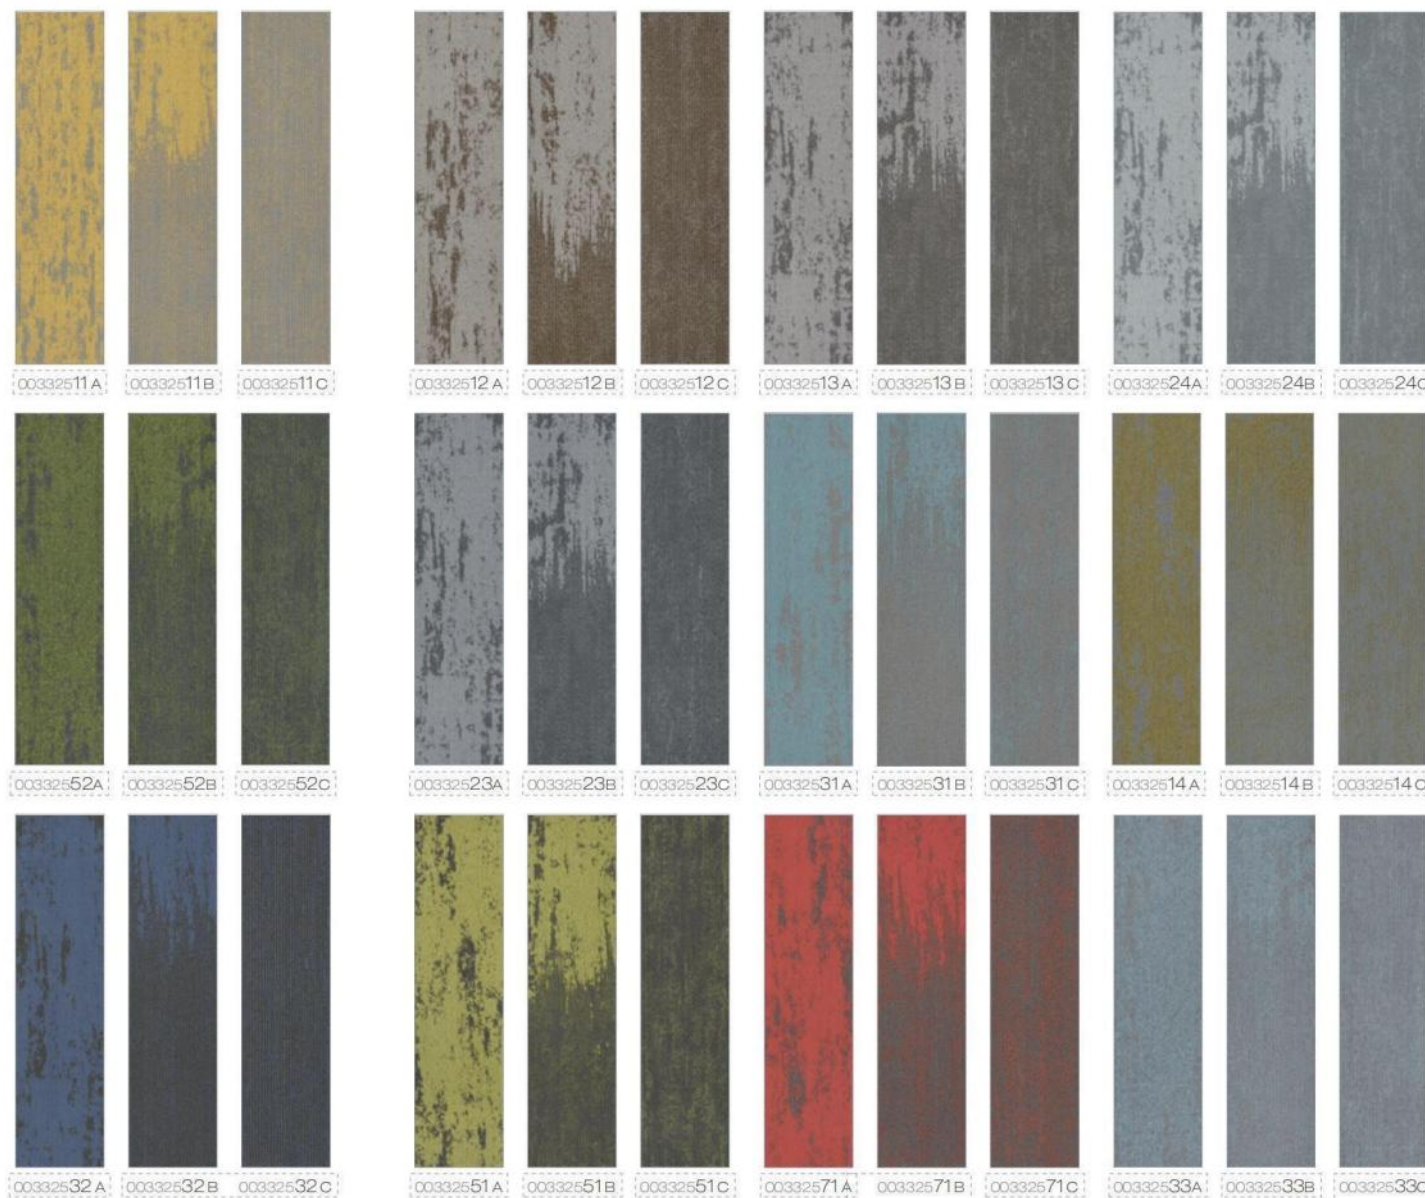







Sedimentation of tired thoughts and expression of unrestrained imagination and artistic conception are all flying and spreading freely here one by one.



00434441+00434442








Specification

Name: XJ
 Face Fiber: 100%Nylon 6
 Backing: PVC+Fiber glass
 Gauge: 1/12
 Stitches per cm: 40 per 10cm
 Pile Weight: 660g/m²
 Pile Height: 2.5-5mm

Total Height: 7mm
 Product Size: 25x100 cm
 Antimicrobial: PASS AATCC TM 174
 Radiant panel: (ASTM E 648) CLASS I
 Nbs smoke: (ASTM E 648) less than 450
 Electrostatic propensity: less than 3.5KV

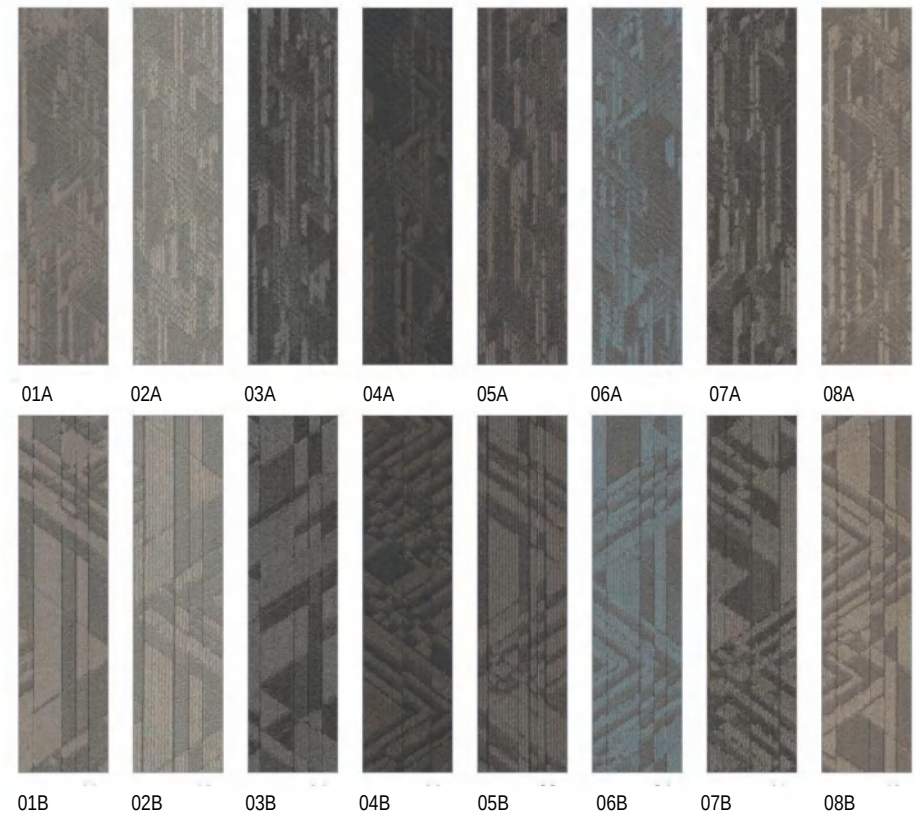











00532352

www.sinoffor.vip

Overwatch series

Specification

Name: SW
Face Fiber: Nylon 6 Blended Yarns
Backing: PVC+Fiber glass
Gauge: 1/12
Stitches per cm: 38 per 10 cm
Pile Weight: 550 g/m²
Pile Height: 2.5-5 mm


Total Height: 7 mm
Product Size: 50x50 cm
Antimicrobial: PASS AATCC TM 174
Radiant panel: (ASTM E 648) CLASS I
Nos smoke: (ASTM E 648) less than 450
Electrostatic propensity: less than 3.5 KV





005323 11




005323 31



005323 21



005323 52



005323 22





005323 51








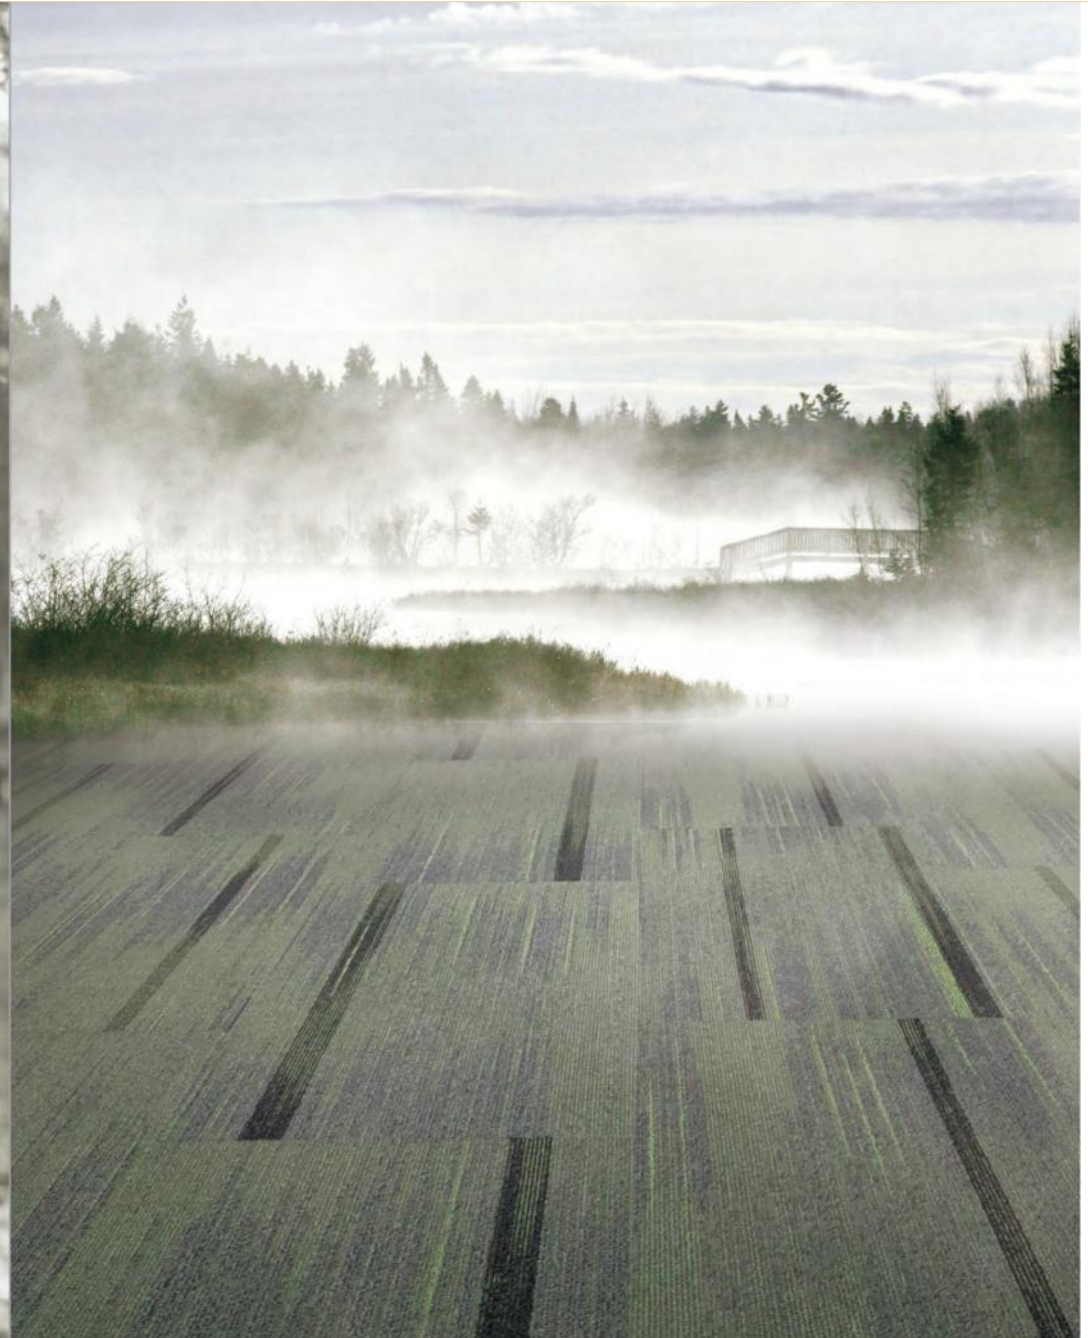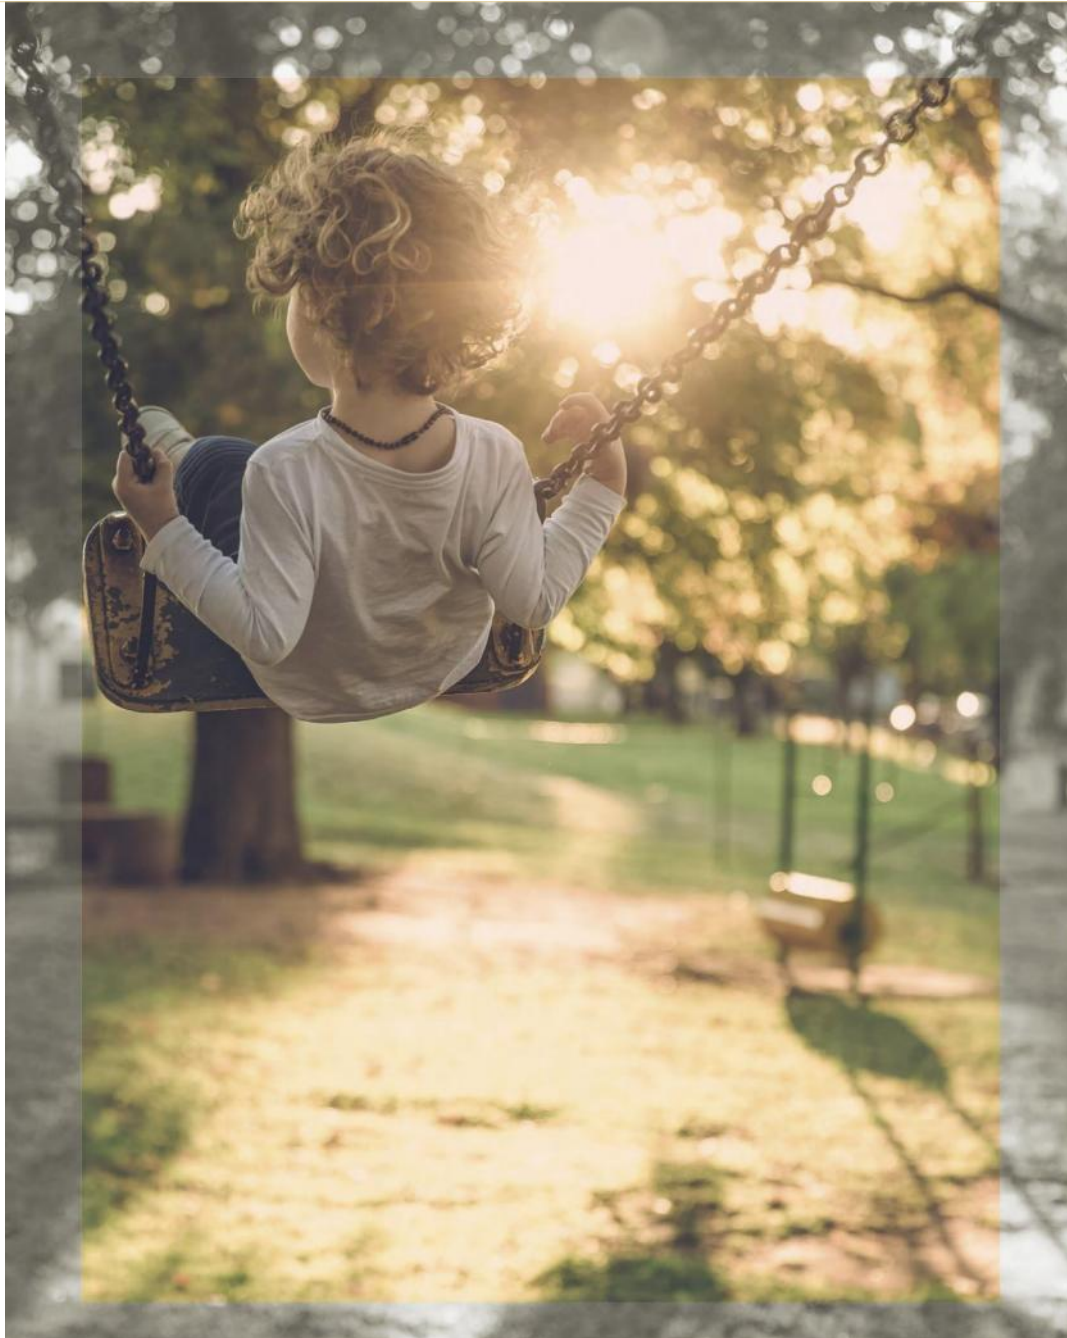





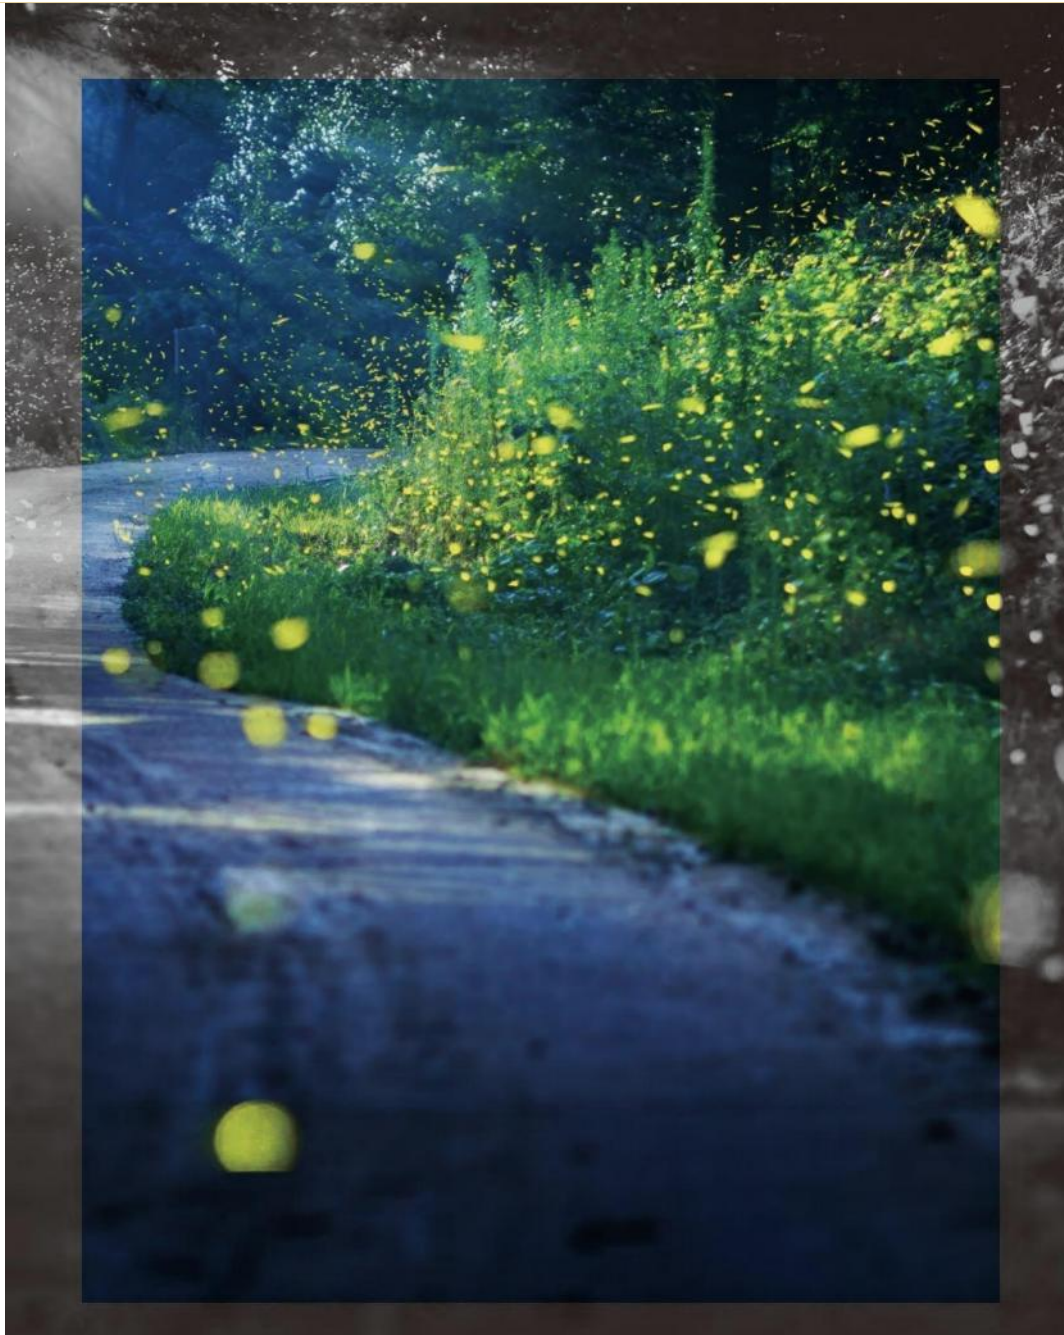

Specification

Name: SX	Total Height: 7mm
Face Fiber: 100%Nylon 6	Product Size: 18x36 in
Backing: PVC	Antimicrobial: PASS AATCC TM 174
Gauge: 1/12	Radiant panel: (ASTM E 648) CLASS I
Stitches per cm: 40 per 10cm	Nbs smoke: (ASTM E 648) less than 450
Pile Weight: 550g/m ²	Electrostatic propensity: less than 3.5KV
Pile Height: 2.5-5mm	



00632211



00632221



00632222



00632223



00632231



00632232



00632241



00632242




00632251





Beauty

Reap the beauty of historical precipitation, inherit the most precious parts, create tenderness and warm with soft colors, bring seemingly similar familiarity, and make the space have more connotation and further implication...




00733532B+00733532C





Imagination

Sedimentation of tired thoughts and expression of unrestrained imagination and artistic conception are all flying and spreading freely here one by one.

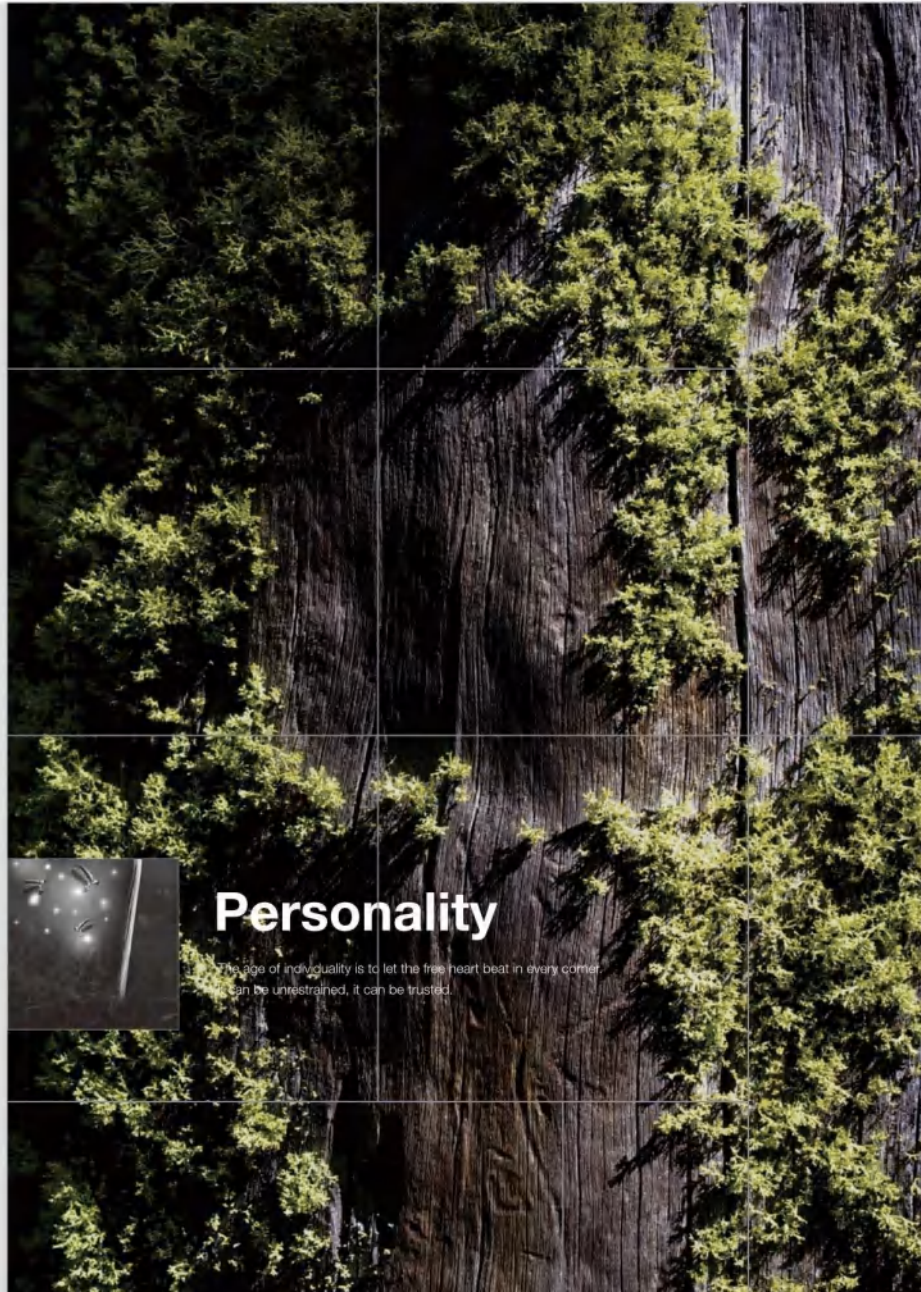



00733533B
00733533C
00733571B
00733571C

The spirit of art only occasionally flashes in the world,
but it can set off waves that can not be calm for a long time in people's minds...



007335332B
007335332C
0073353382B



007345 11A



007345 21A



007345 22A



007345 23A



007345 24A



007335 82B



007335 81B



007335 32B



007335 31B




007335 52B




007335 51B




007335 12B



007335 25B



007335 71B



007335 33B



007335 82C



007335 81C



007335 32C



007335 31C



007335 52C



007335 51C



007335 12C



007335 25C



007335 71C



007335 33C


Single Carpet Pattern



Specification

Name: SZL
Face Fiber: 100%Nylon 6
Backing: PVC+Fiber glass
Gauge: 1/12
Stitches per cm: 38 per 10cm
Pile Weight: 800g/m²
Pile Height: 2.5-7mm
Total Height: 8mm
Product Size: 45.72x91.44cm
Antimicrobial: PASS AATCC TM 174
Radiant panel: (ASTM E 648) CLASS I
Nbs smoke: (ASTM E 648) less than 450
Electrostatic propensity: less than 3.5KV





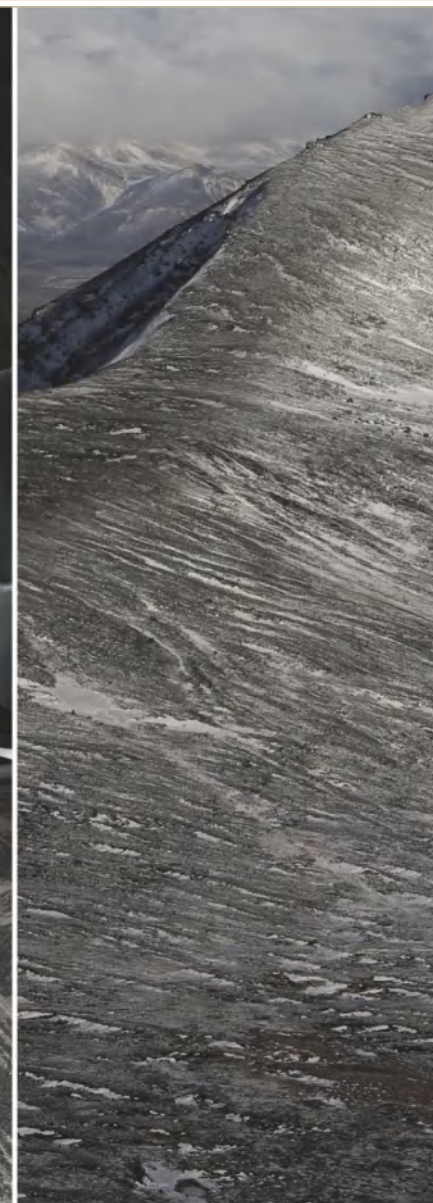

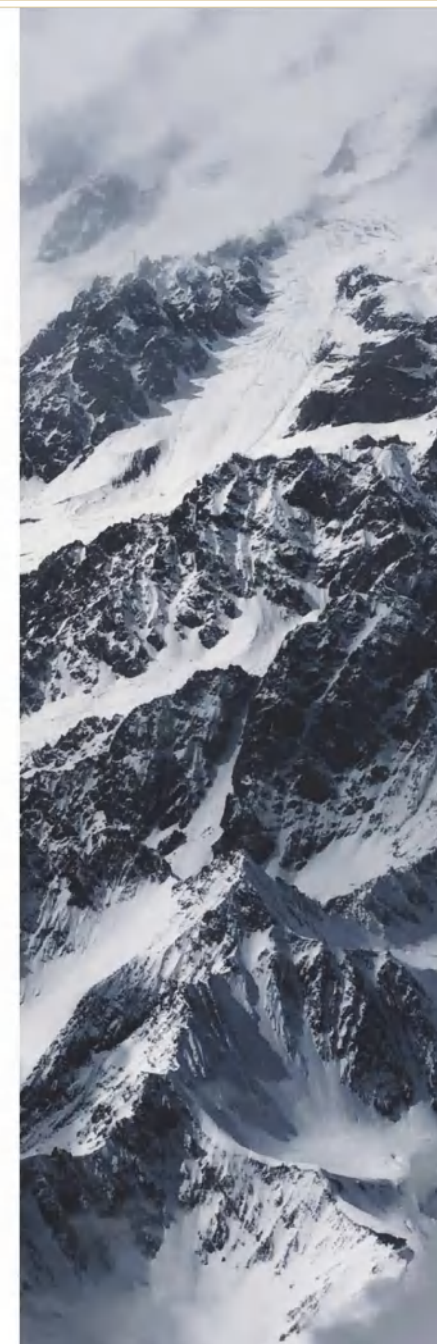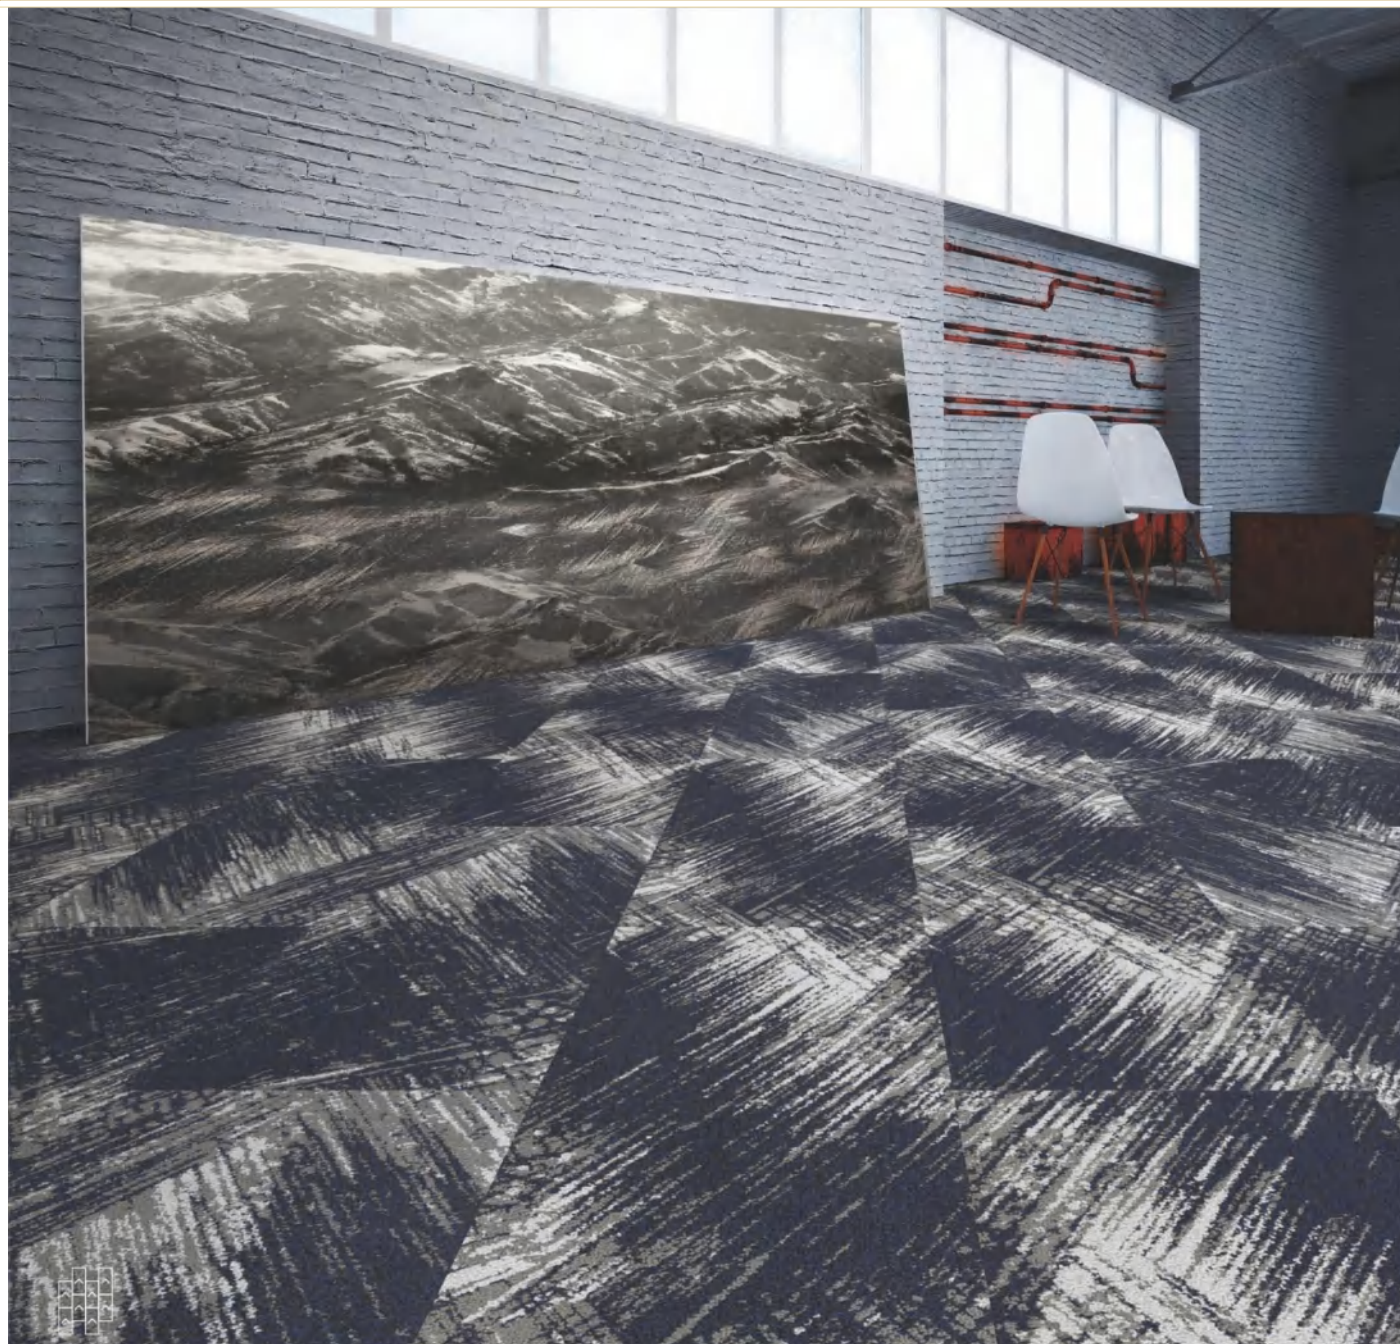



Single Carpet Pattern

Specification

Name: Dawn

Face Fiber: 100%Nylon 6

Backing: PVC+Fiber glass

Gauge: 1/12

Stitches per cm: 35 per 10cm

Pile Weight: 950g/m²

Pile Height: 2.5-7mm

Total Height: 10mm

Product Size: 18x36 in

Antimicrobial: PASS AATCC TM 174

Radiant panel: (ASTM E 648) CLASS I

Nbs smoke: (ASTM E 648) less than 450

Electrostatic propensity: less than 3.5KV



00833411



00833441



00833442




00833421



00833422



00833431





Install Options:
Ashlar Half Drop

01333511B

01333523A+01333523B



Fascinating
Poetry

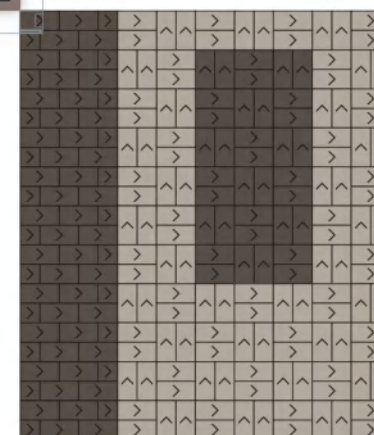

Install Options:
Basketweave & Brick Half Drop


01333511B
01333542A+01333542B



chinoiserie




Chinese style elements are still popular on the design stage. Full of oriental charm, The use of patterns inherits the rich oriental aesthetic taste. Ancient, classic, lively, young...

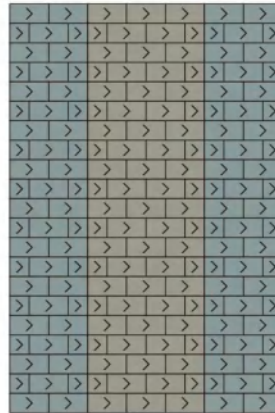


Install Options:
Brick Half Drop

01333513B
01333531A+01333531B

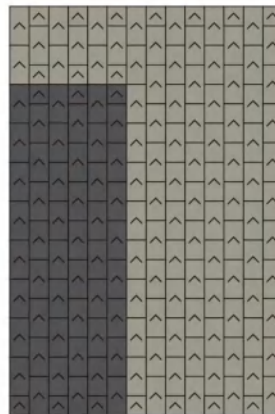

Install Options:
Ashlar Half Drop

01333513B

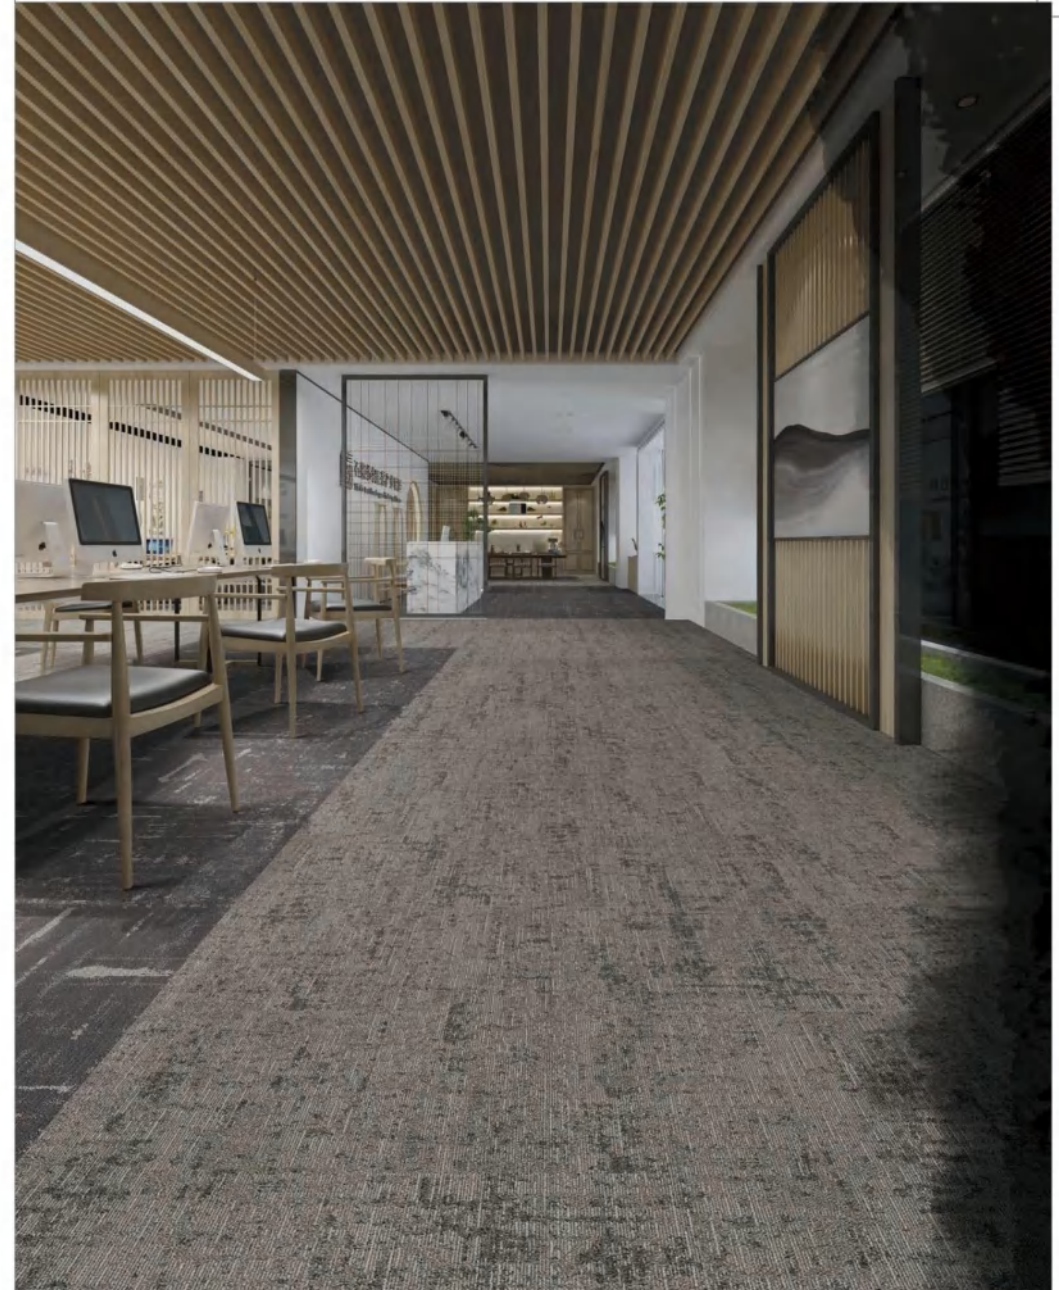





Lasting Appeal

One stroke,
a word
can become
a picture.

Designers will calligraphy unique aesthetic characteristics into the design of the carpet, that is, let a person feel with the Oriental ink dye for thousands of years of aesthetic charm, and do not lose the carpet fresh modern breath, faint reveal the cultural background of the master space.

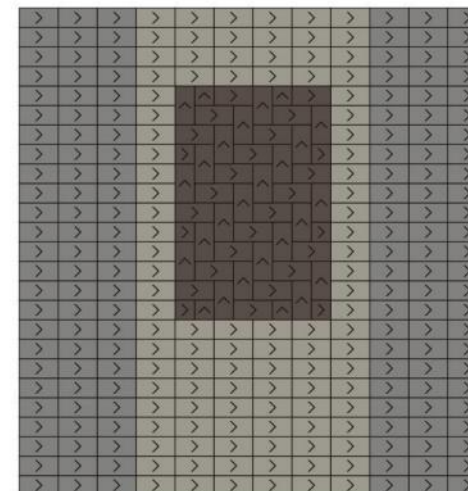

Install Options:
Linear & Herringbone
01333513B+01333541B
01333542A+01333542B

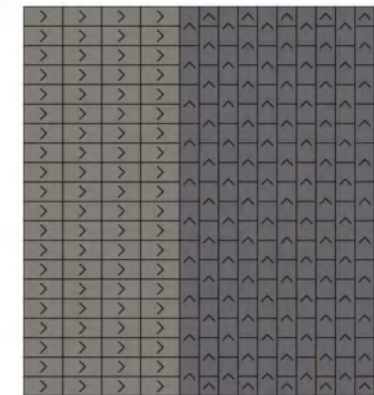

Install Options:
Linear & Ashlar Half Drop


01333523B
01333541A+01333541B



Culture Art



Reap the beauty of historical precipitation, inherit the most precious parts, create tenderness and warm with soft colors, bring seemingly similar familiarity, and make the space have more connotation and further implication...

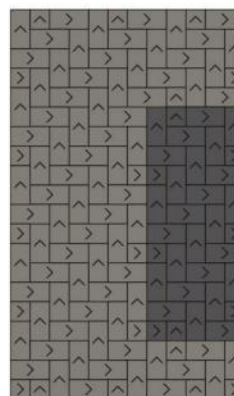

Install Options:
Herringbone

01333522A+01333522B



Single Carpet Pattern

Specification

Name: GF
Face Fiber: 100%Nylon 6
Backing: PVC+Fiber glass
Gauge: 1/12
Stitches per cm: 36 per 10cm
Pile Weight: 750g/m²
Pile Height: 2.5-7mm

Total Height: 9mm
Product Size: 45.72x91.44cm
Antimicrobial: PASS AATCC TM 174
Radiant panel: (ASTM E 648) CLASS I
Nbs smoke: (ASTM E 648) less than 450
Electrostatic propensity: less than 3.5KV

013335 11 A

013335 12 A

013335 13 A

013335 21 A

013335 22 A

013335 23 A

013335 31 A

013335 41 A

013335 42 A



**Oriental
Charm**

013335 11 B

013335 12 B

013335 13 B

013335 21 B


013335 22 B

013335 23 B

013335 31 B

013335 41 B

013335 42 B

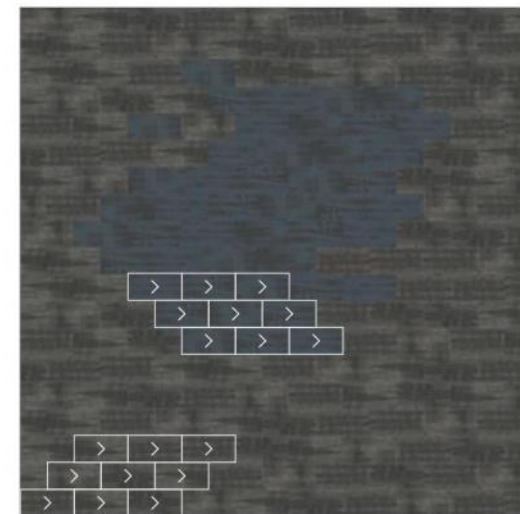

01432421



01432431






Reap the beauty of historical precipitation, inherit the most precious parts, create tenderness and warm with soft colors, bring seemingly similar familiarity, and make the space have more connotation and further implication...




01432431



01432442

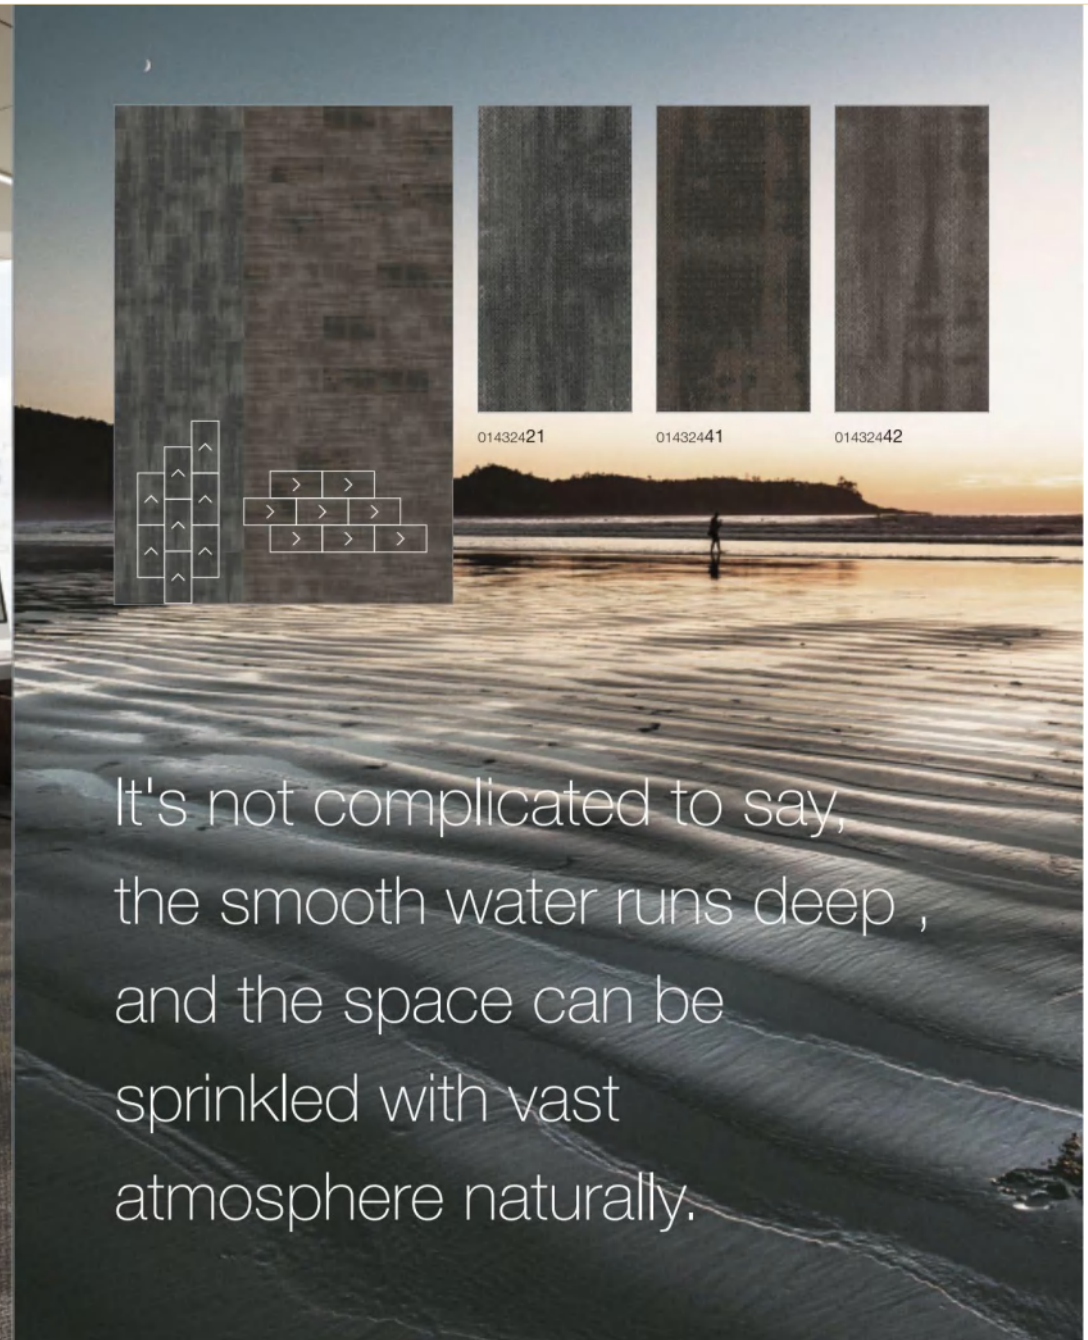


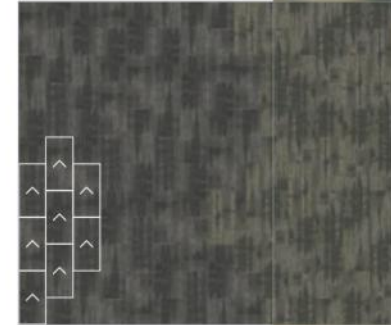


01432421



01432451

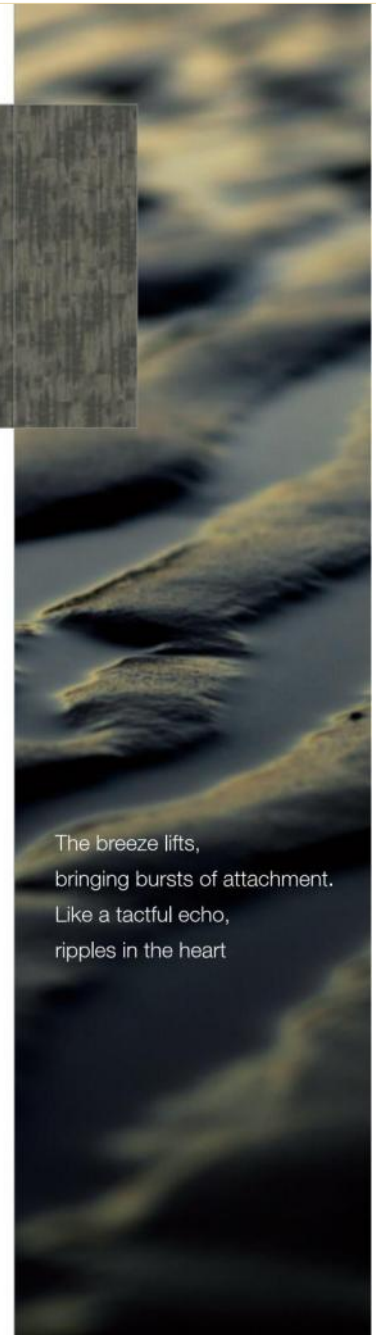


The breeze lifts,
bringing bursts of attachment.
Like a tactful echo,
ripples in the heart

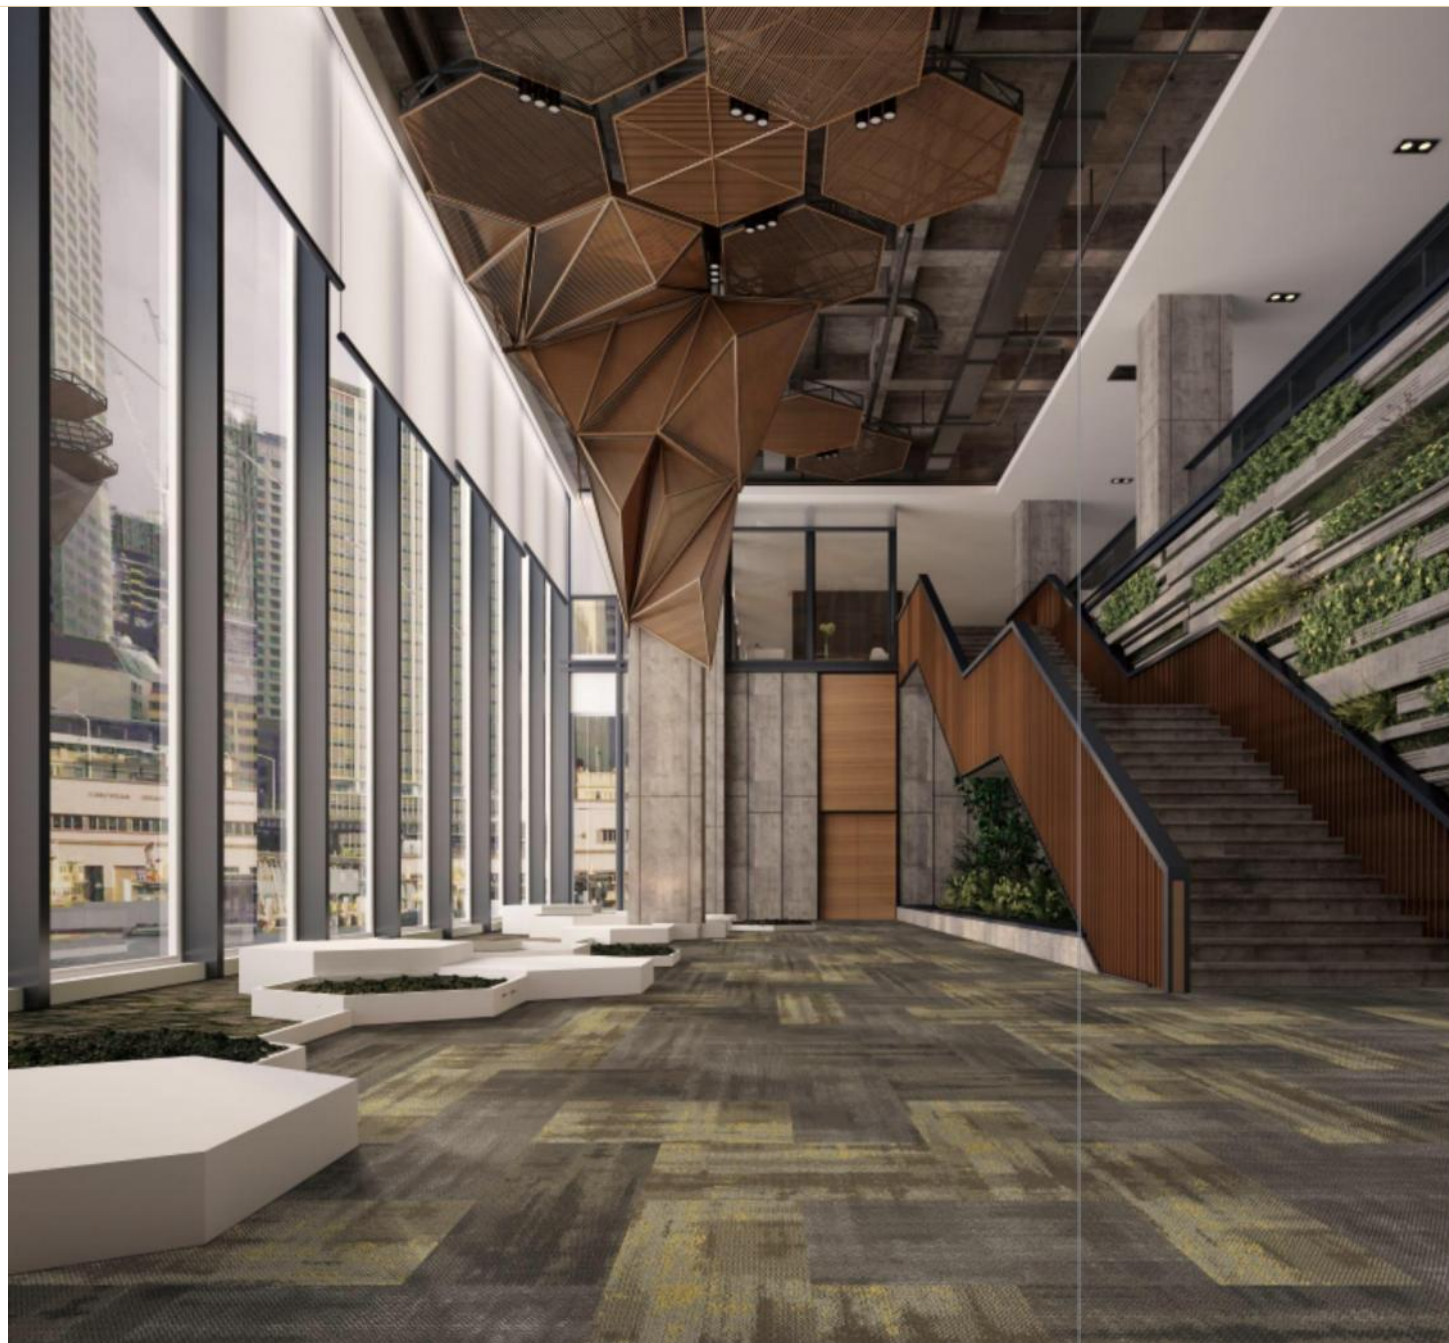

01432441



01432442



01432481



Single Carpet Pattern

Specification

Name: RLS
 Face Fiber: 100%Nylon 6
 Backing: PVC+Fiber glass
 Gauge: 1/12
 Stitches per cm: 35 per 10cm
 Pile Weight: 640g/m²
 Pile Height: 3.0-6.0mm
 Total Height: 8mm
 Product Size: 45.72x91.44 cm
 Antimicrobial: PASS AATCC TM 174
 Radiant panel: (ASTM E 648) CLASS I
 Nbs smoke: (ASTM E 648) less than 450
 Electrostatic propensity: less than 3.5KV




01432421



01432431




01432441

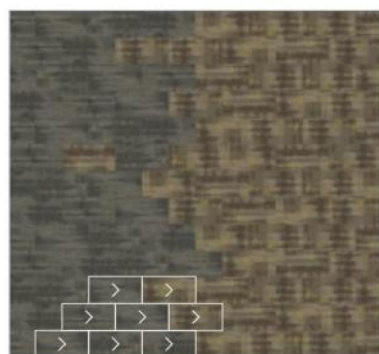

01432451




01432481



01432442



01432451



01432481

Sedimentation of tired thoughts and expression of unrestrained imagination and artistic conception are all flying and spreading freely here one by one.



Geometric Space



几何图形元素自身即是一种视觉语言。贯穿在产品设计中，是设计师直入生活本色的适度返朴。追求产品的简洁纯粹，但对材料的质感、工艺的要求却很高。质感不仅是一种身体的触摸，有时可以是一种视觉感受。典雅凝练的东方色韵，古朴利落、简洁明快、形色不杂，隐隐流露些许俊逸之气和浓浓雅正端方的视觉气度。


The element of geometry is itself a visual language. Throughout the product design, is the designer straight into the natural life of moderate simplicity. The pursuit of simplicity and purity of products, but the texture of materials, technology requirements are very high. Texture is not only a touch of the body, sometimes can be a visual experience. The Oriental charm of elegance and conciseness, of primitive simplicity is agile, concise and lively, form color is not miscellaneous, faint reveal the visual bearing of the gas of a bit of junyi and thick and elegant square.

The element
of geometry is itself
a visual language.





Define the latest fashion
Visual

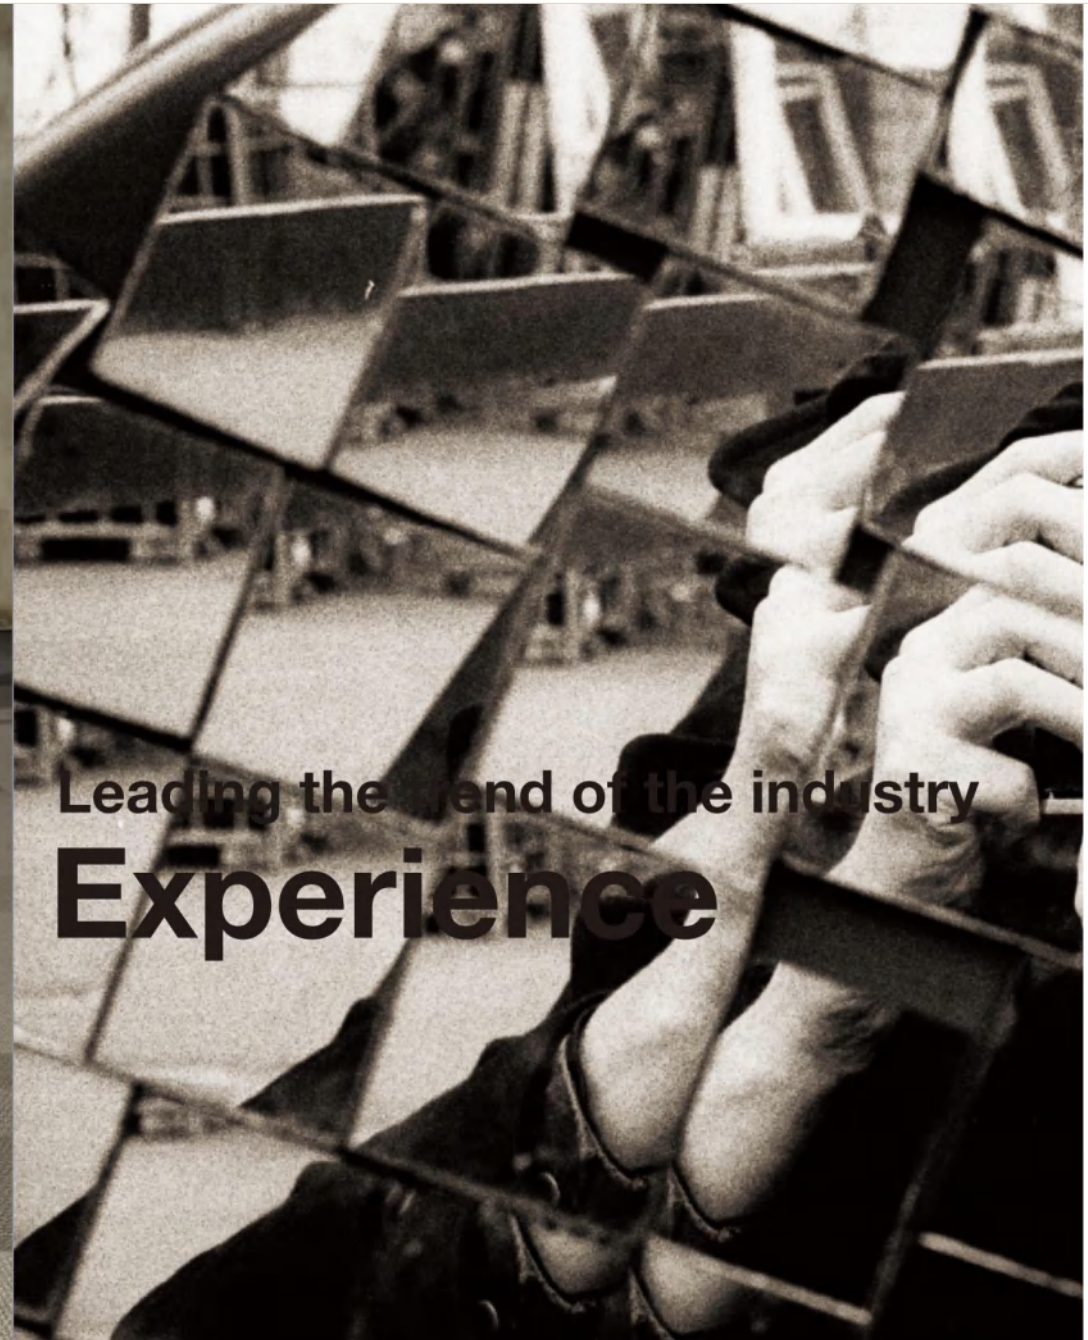

Leading the trend of the industry
Experience




Open Mind

Free Imagination

Tolerant **Culture**


Amazing Creativity

Internationalized **Fashion**

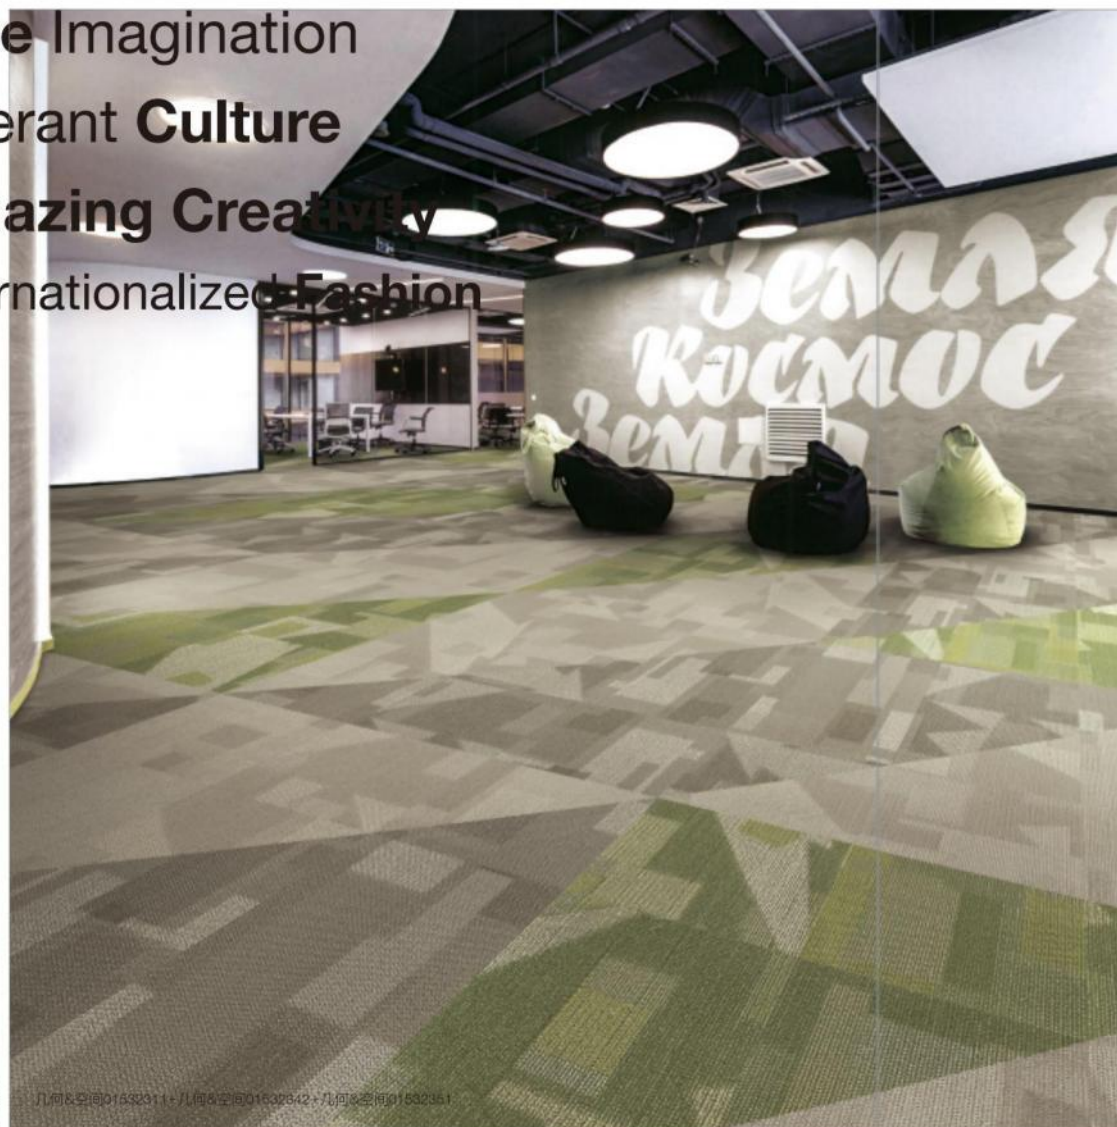


Present a retro style in simplicity, and experience the post-modern atmosphere in classicity. Without deliberate arrangement, the whole space is taking on a new look...

Distinguished from avant-garde and alternative, quite different from simplicity and luxury, aestheticism is a feast of taste and talent, which can only be tasted with a wise eye.

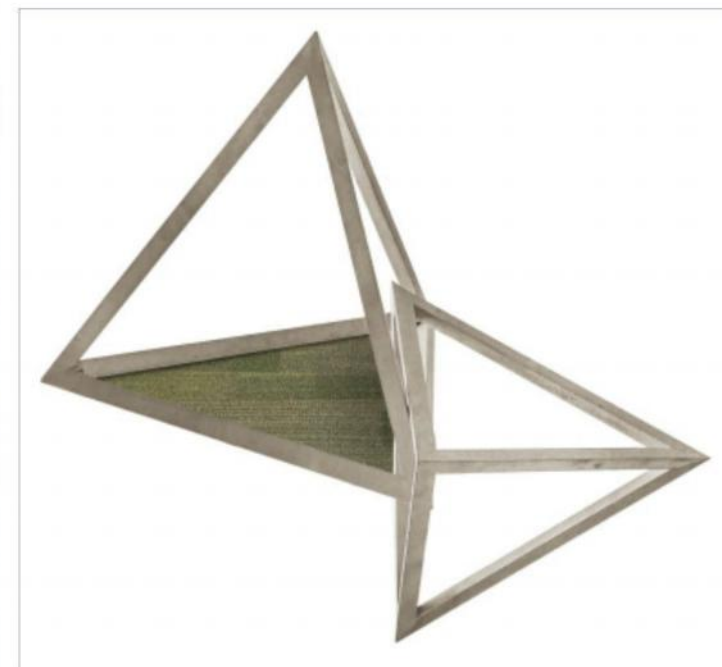

几何&空间01632311+几何&空间01632342+几何&空间01632351



几何01532342+几何01532351+几何01532381



Visual Impact

Throughout the product **design**, is the designer straight into the **natural life** of moderate simplicity.


Texture is not only
a touch of the **body**
sometimes, can be
a **Visual Arts**



Inspiration comes from nature, taste comes from wisdom eye,
simple and simple design, calm and introverted color,
all of them are pouring out unique aesthetic connotation.
The spirit of art only occasionally flashes in the world,
but it can set off waves that can not be calm for a long time in people's minds...





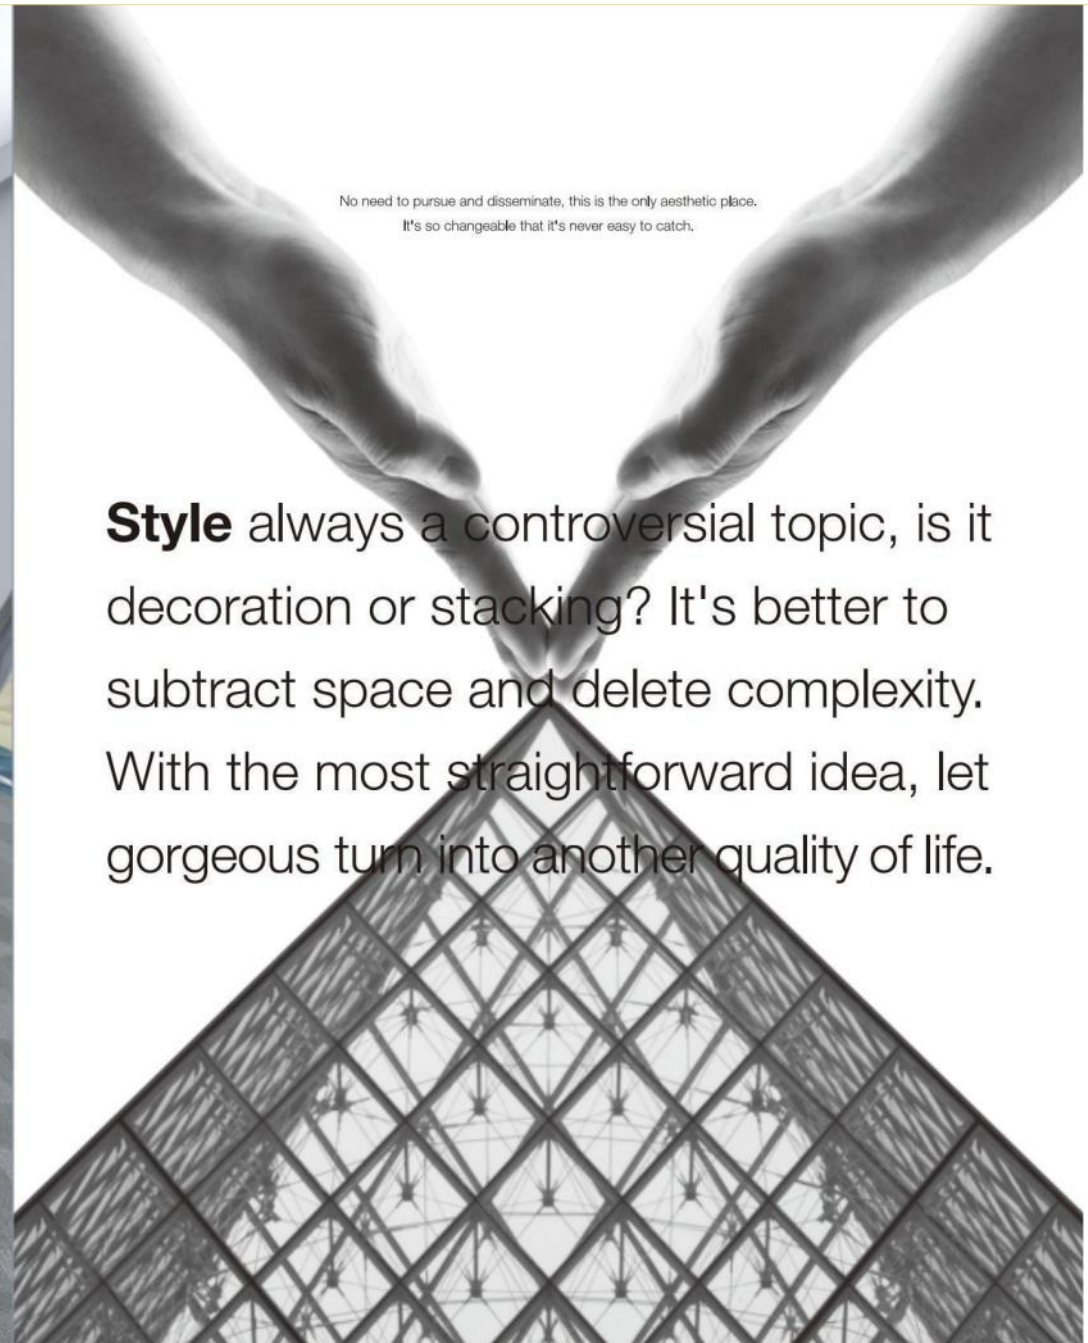

No need to pursue and disseminate, this is the only aesthetic place.
It's so changeable that it's never easy to catch.

Style always a controversial topic, is it decoration or stacking? It's better to subtract space and delete complexity. With the most straightforward idea, let gorgeous turn into another quality of life.



Single Carpet Pattern

Specification

Name: JH
Face Fiber: 100%Nylon 6
Backing: PVC+Fiber glass
Gauge: 1/12
Stitches per cm: 36 per 10cm
Pile Weight: 640g/m²
Pile Height: 3.0-5.6mm
Total Height: 8mm
Product Size: 45.72x91.44cm
Antimicrobial: PASS AATCC TM 174
Radiant panel: (ASTM E 648) CLASS I
Nbs smoke: (ASTM E 648) less than 450
Electrostatic propensity: less than 3.5KV



Make
the **space**
have
more
connotation



几何 01532381



空间 01532381



几何 01532351



空间 01532351



几何 01532331



空间 01532331



几何 01532311



空间 01532311



几何 01532342



空间 01532342




几何 01532341



空间 01532341




几何 01532323

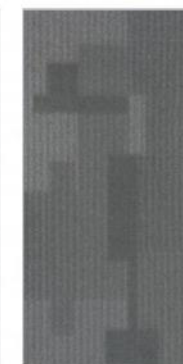

空间 01532323




几何 01532322

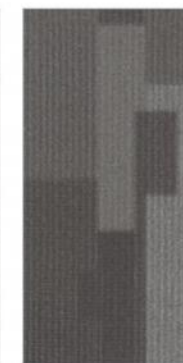

空间 01532322



几何 01532321

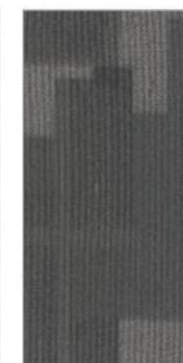


空间 01532321



当光跃出山涧、海面，冲破晨曦！一天的美好就在这与光的第一次邂逅中开启！
When the light leaps out of the mountain stream and the sea,
it breaks through the dawn! The beauty of the day also begins in this first encounter with light.






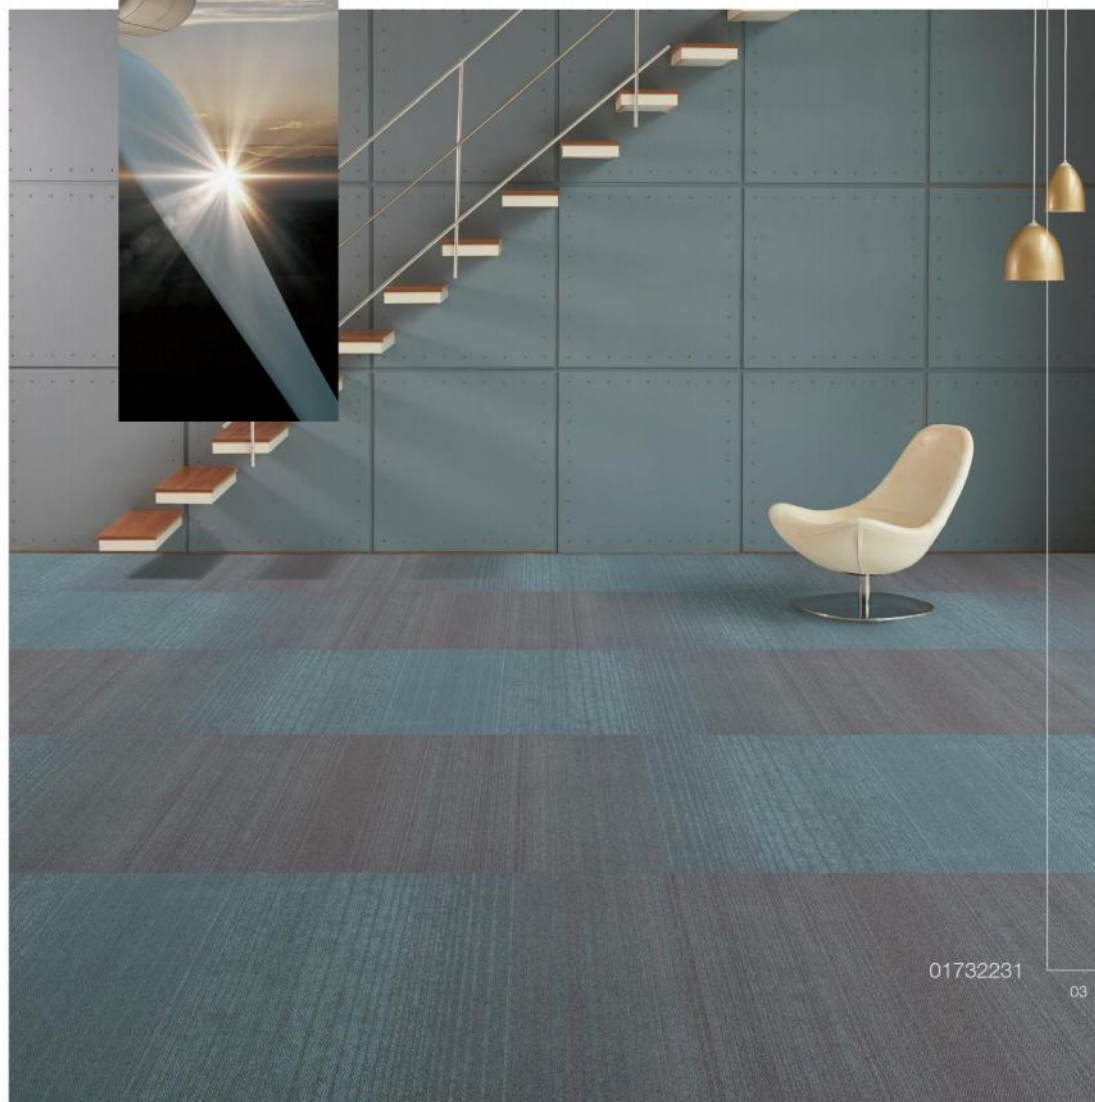


01732231

03

坚定寻光的信念，坚持觅光的方向，坚信前路有同伴，
愿每个人生寻光者，沐光而遇，追光同行！


Firmly in seeking light,keep direction , and believe that there
are companions on the way. Wish everyone life to find light,
meet and follow the light!

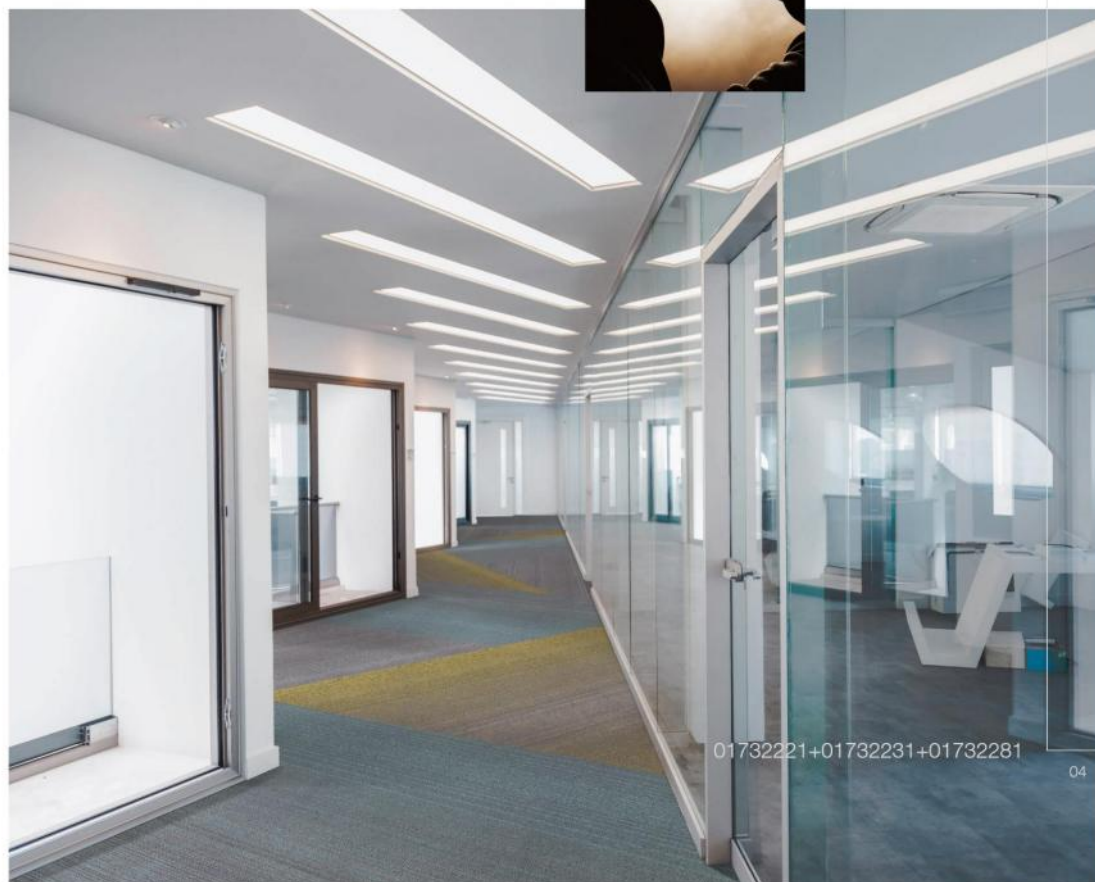




01732221+01732231+01732232+01732252

06

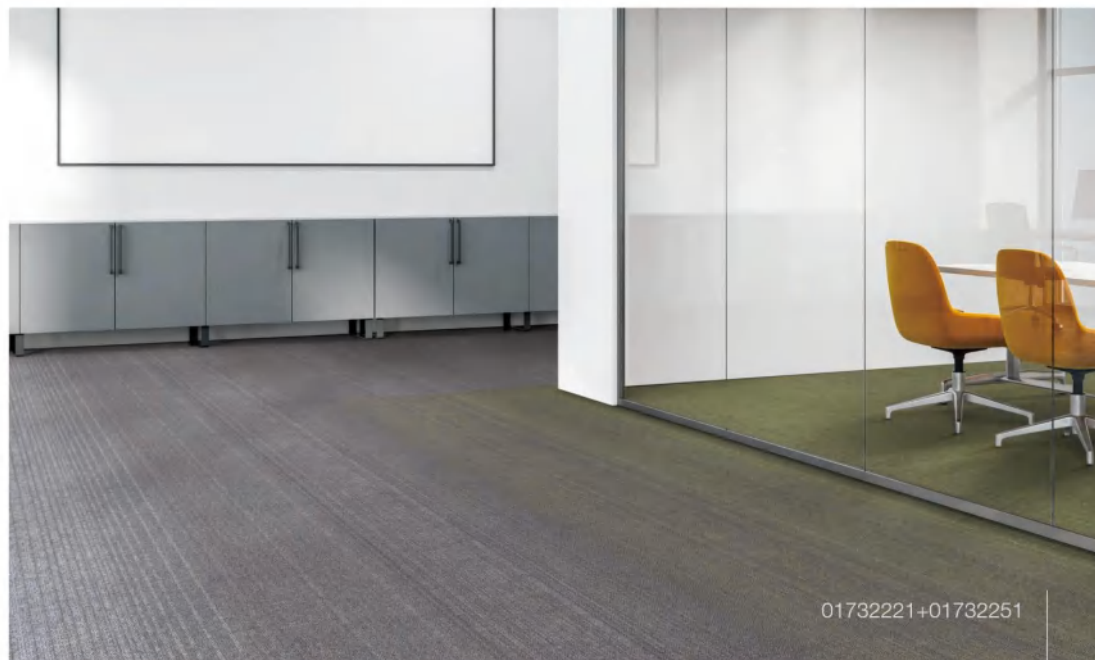

01732221+01732251

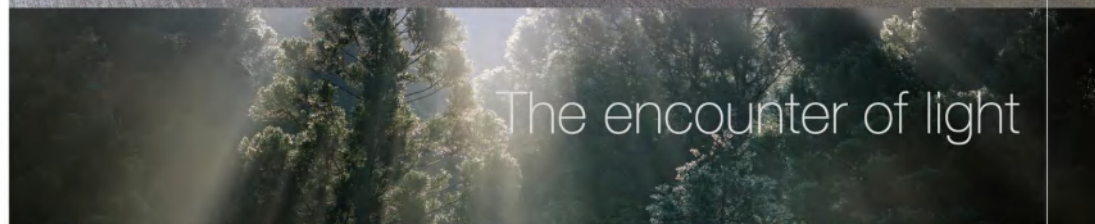

The encounter of light



01732251+01732252+01732253

07



01732221+01732281

08



它是人类在诞生伊始，就在追寻的一样东西——光。经历这几千年的岁月沉淀，它还是如此神秘而飘渺不定。人类用一切属于美好的词汇概括它，


美好、梦幻、希望、自由。在寻光的旅途中，谁也没有懈怠过，真挚而虔诚。

It is the same thing that human beings are pursuing at the beginning of their birth-light. After thousands of years of precipitation, it is still so mysterious and uncertain. Human beings summarize it with all the words that belong to beauty, dream, hope and freedom. In the journey of seeking light, no one has been slack, sincere and pious.



01732281

10

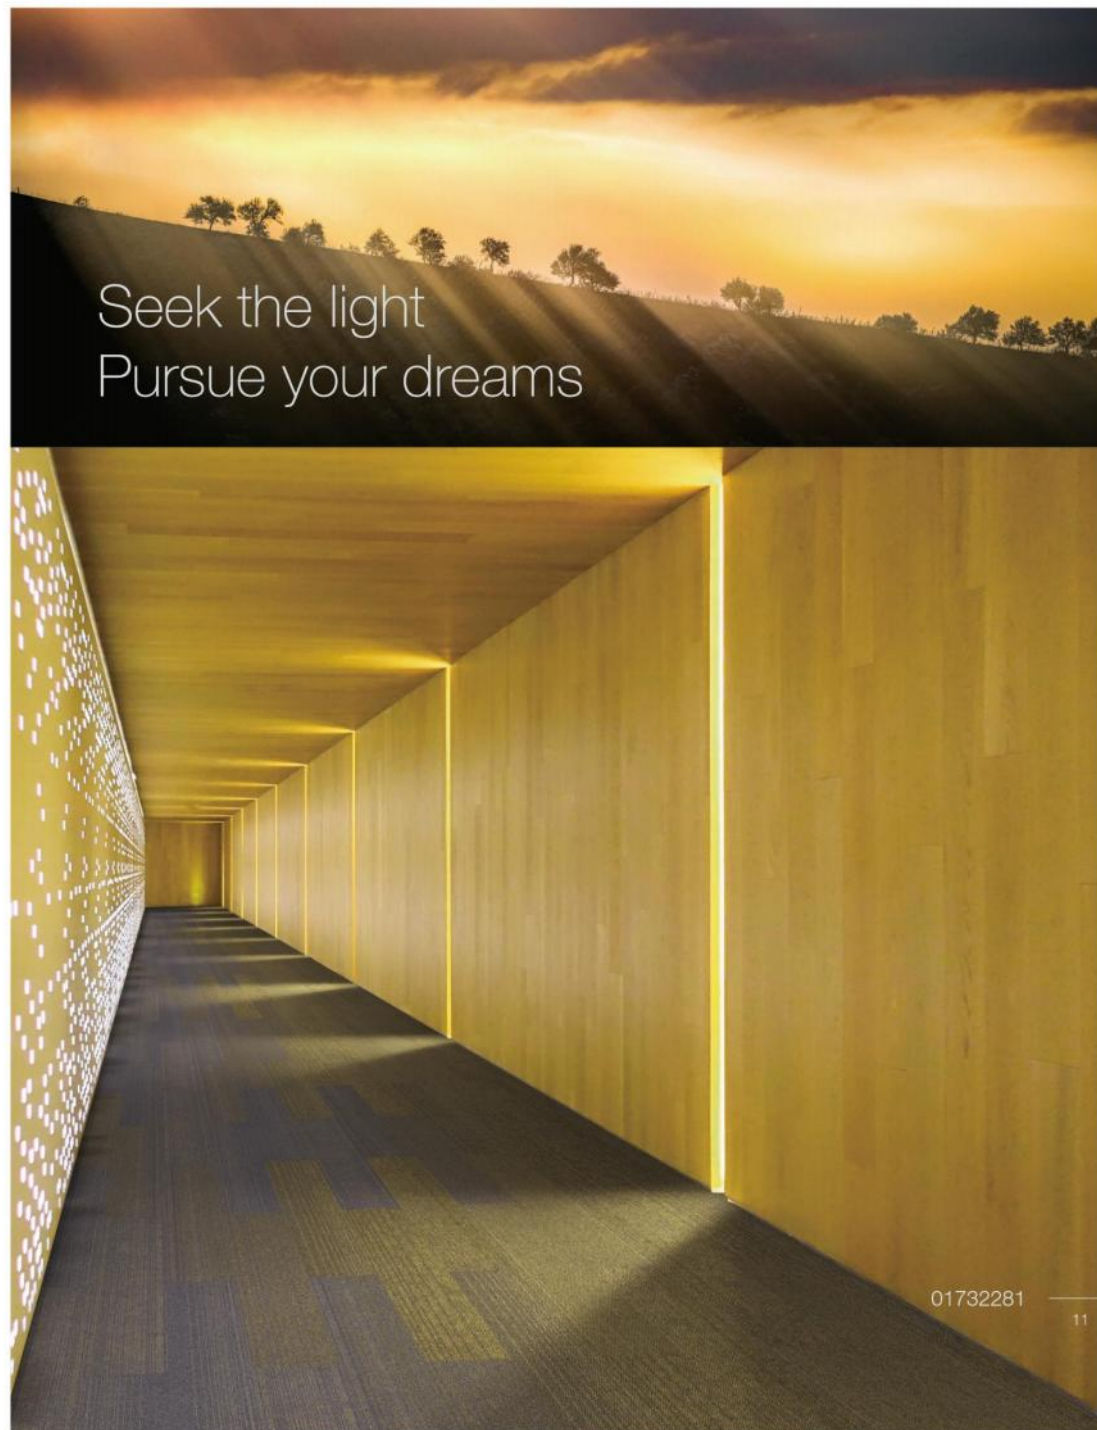







Specification

Name: xG
Face Fiber: 100%Nylon 6
Backing: PE Bio-ReBac® Comfort
Gauge: 1/12
Stitches per cm: 36 per 10cm
Pile Weight: 640g/m²
Pile Height: 3.0-5.6mm
Total Height: 8mm
Product Size: 25x100cm
Antimicrobial: PASS AATCC TM 174
Radiant panel: (ASTM E 648) CLASS I
Nbs smoke: (ASTM E 648) less than 450
Electrostatic propensity: less than 3.5KV





01631221A+01631221C+01631222A



01631221A+01631222A+01631223A



PRODUCT INFORMATION

CX SERIES

Construction/ 结构	Multi-level Loop		
Fiber/ 纤维	100% Nylon6		
Dye method/ 染色工艺	100% solution dyed		
Backing/ 底背	PVC		
Tufting Gauge/ 针密	50.00 rows per 10cm		
Pile Weight/ 绒重	500g/m²		
Pile Height/ 绒高	3-4mm		
Total Thickness/ 厚度	Approx 6.5mm		
Tile Size/ 尺寸	500mmx500mm		
Nbs Smoke 烟密度	(ASTM E 662) less than 450		
Flooring Radiant Panel 临界热辐射通量	Class I (Mean average CRF:0.45 watts/cm² or higher)	ASTM E-648	
Electrostatic Propensity 静电倾向	3.0 kV or lower	AATCC 134	
Colourfastness to Light 耐光色牢度	≥4 after 100 hours	AATCC 16E	

PRODUCT NOTES:

1. Product specifications are derived from averages resulting from normal manufacturing tolerances in yarn, fiber, temperature, humidity and colour. Product specifications may vary within normal industry and standardised testing tolerances.
2. These specifications reflect mean averages based upon tests of production runs of this carpet style by independent laboratories. A range of variances is implicit in the testing process. Furthermore, the standard test methods established to derive the specifications lack a degree of precision and repeatability; therefore, individual test results on the actual carpet purchased may differ from the specifications above.
3. Colours may vary slightly from dye lot to dye lot.
4. Backing or other materials may be changed without prior notice when shortages occur or when technological advancements become available which provide for improvement of the product's performance.
5. All products are 100% recyclable.




01132411



01132422+01132424



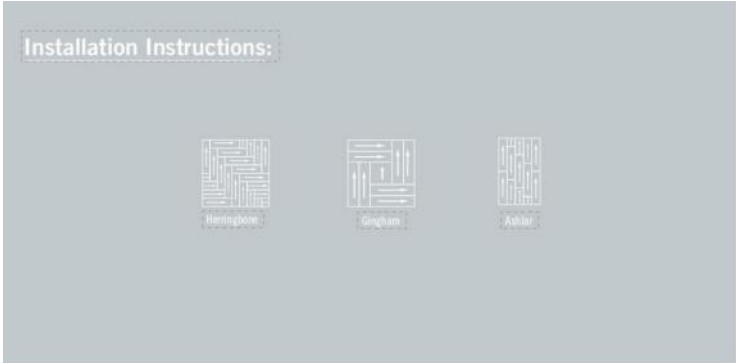

PRODUCT INFORMATION

JB SERIES

Fiber/纤维	100% Nylon6
Dye method/染色工艺	100% solution dyed
Backing/底背	PVC
Tufting Gauge/针密	47.00 rows per 10cm
Pile Weight/绒重	560g/m²
Pile Height/絨高	5.5mm
Total Thickness/厚度	Approx 7mm
Tile Size/尺寸	250mmx1000mm
Nbs Smoke 烟密度	(ASTM E 662) less than 450
Flooring Radiant Panel 临界热辐射通量	Class I (Mean average CRF:0.45 watts/cm² or higher) ASTM E-648
Electrostatic Propensity 静电倾向	3.0 kV or lower AATCC 134
Colourfastness to Light 耐光色牢度	≥4 after 100 hours AATCC 16E


PRODUCT NOTES:


1. Product specifications are derived from averages resulting from normal manufacturing tolerances in yarn, fiber, temperature, humidity and colour. Product specifications may vary within normal industry and standardised testing tolerances.
2. These specifications reflect mean averages based upon tests of production runs of this carpet style by independent laboratories. A range of variances is implicit in the testing process. Furthermore, the standard test methods established to derive the specifications lack a degree of precision and repeatability; therefore, individual test results on the actual carpet purchased may differ from the specifications above.
3. Colours may vary slightly from dye lot to dye lot.
4. Backing or other materials may be changed without prior notice when shortages occur or when technological advancements become available which provide for improvement of the product's performance.
5. All products are 100% recyclable.





01232512+01232551

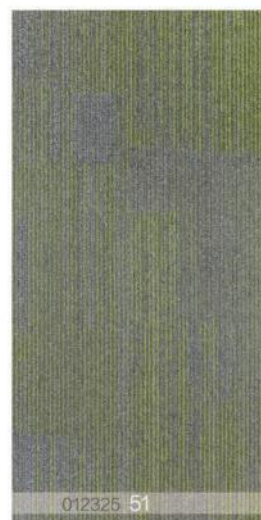

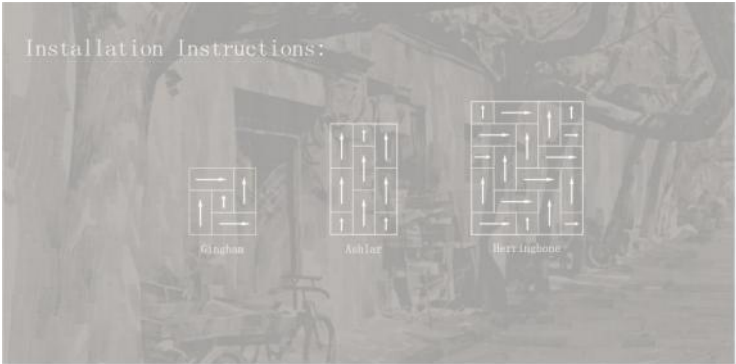

PRODUCT INFORMATION

KH SREIES

Construction	Multi-level Loop		
Fiber	100% Nylon6		
Dye method	100% solution dyed		
Backing	PVC		
Tufting Gauge	47.00 rows per 10cm		
Pile Weight	550g/m²		
Pile Height	3.5-5.5mm		
Total Thickness	Approx 7mm		
Tile Size	500mmx1000mm		
Surface Flammability	Passes CPSC FF 1-70	ASTM D-2859	
Flooring Radiant Panel	Class I (Mean average CRF:0.45 watts/cm² or higher)	ASTM E-648	
Electrostatic Propensity	3.0 kV or lower	AATCC 134	
Colourfastness to Light	≥4 after 100 hours	AATCC 16E	

PRODUCT NOTES:


1. Product specifications are derived from averages resulting from normal manufacturing tolerances in yarn, fiber, temperature, humidity and colour. Product specifications may vary within normal industry and standardised testing tolerances.
2. These specifications reflect mean averages based upon tests of production runs of this carpet style by independent laboratories. A range of variances is implicit in the testing process. Furthermore, the standard test methods established to derive the specifications lack a degree of precision and repeatability; therefore, individual test results on the actual carpet purchased may differ from the specifications above.
3. Colours may vary slightly from dye lot to dye lot.
4. Backing or other materials may be changed without prior notice when shortages occur or when technological advancements become available which provide for improvement of the product's performance.
5. All products are 100% recyclable.




01031251A+01031223A+01031223C



01031222A+01031222B+01031222C

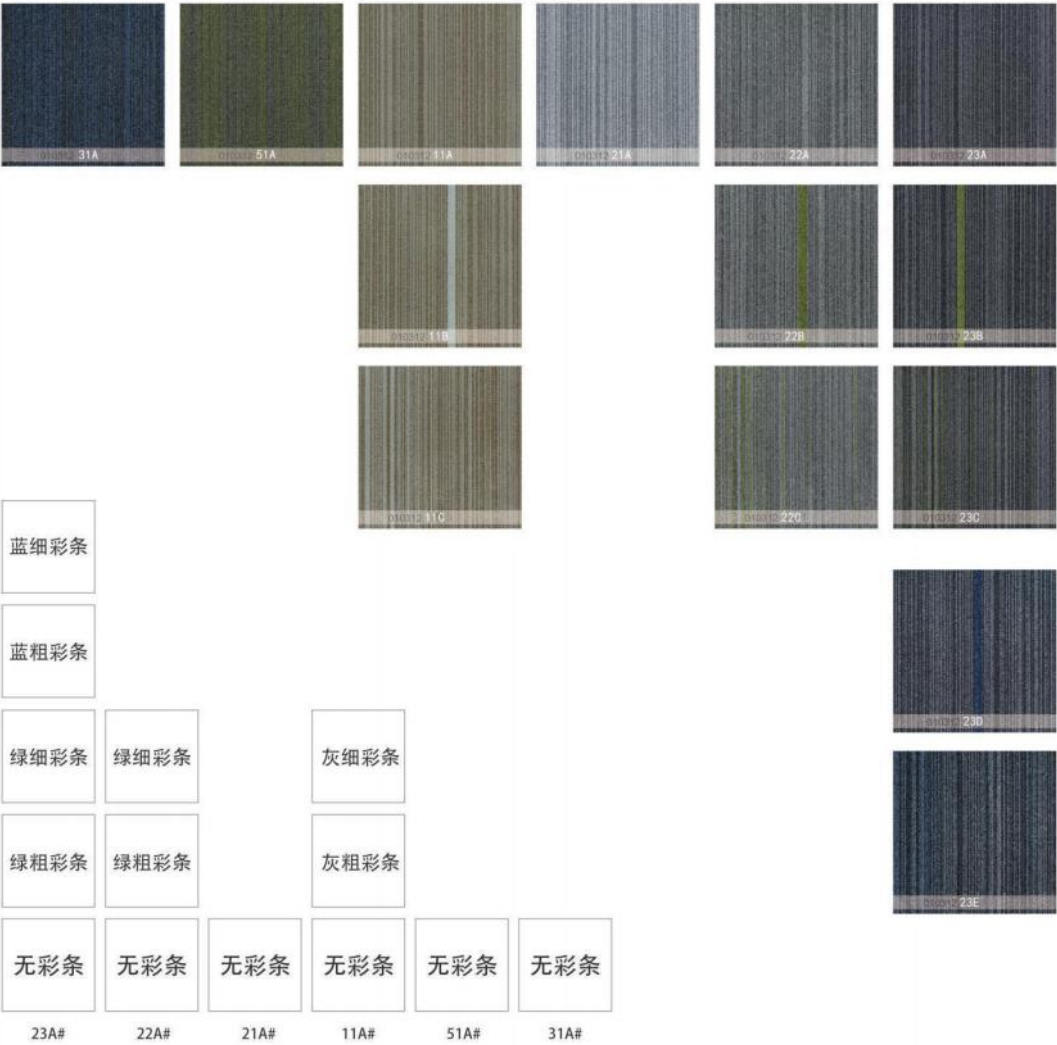

Installation Instructions:



PRODUCT INFORMATION

ZX SERIES

Construction/ 结构	Multi-level Loop	
Fiber/ 纤维	100% Nylon6	
Dye method/ 染色工艺	100% solution dyed	
Backing/ 底背	PVC	
Tufting Gauge/ 针密	50.00 rows per 10cm	
Pile Weight/ 绒重	500g/m²	
Pile Height/ 绒高	3-4mm	
Total Thickness/ 厚度	Approx 6.5mm	
Tile Size/ 尺寸	500mmx500mm	
Nbs Smoke 烟密度	(ASTM E 662) less than 450	
Flooring Radiant Panel 临界热辐射通量	Class I (Mean average CRF:0.45 watts/cm² or higher)	ASTM E-648
Electrostatic Propensity 静电倾向	3.0 kV or lower	AATCC 134
Colourfastness to Light 耐光色牢度	≥4 after 100 hours	AATCC 16E

PRODUCT NOTES:

1. Product specifications are derived from averages resulting from normal manufacturing tolerances in yarn, fiber, temperature, humidity and colour. Product specifications may vary within normal industry and standardised testing tolerances.
2. These specifications reflect mean averages based upon tests of production runs of this carpet style by independent laboratories. A range of variances is implicit in the testing process. Furthermore, the standard test methods established to derive the specifications lack a degree of precision and repeatability; therefore, individual test results on the actual carpet purchased may differ from the specifications above.
3. Colours may vary slightly from dye lot to dye lot.
4. Backing or other materials may be changed without prior notice when shortages occur or when technological advancements become available which provide for improvement of the product's performance.
5. All products are 100% recyclable.



031121+031123



031121+031181



031122+031131



031122+031141



031122+031151+031181



031121+031122+031123



031121+031122+031123



031121+031122+031123+031181



031121+031123



031121+031123+031131



031122+031151



INSTALLATION INSTRUCTIONS:



Herringbone



Gingham



Ashlar

PRODUCT INFORMATION

0311 SERIES

Construction/结构	Multi-level Loop
Fiber/纤维	Blended Nylon
Dye method/染色工艺	100% solution dyed
Backing/底背	可回收环保PE软底
Tufting Gauge/针密	47.00 rows per 10cm
Pile Weight/绒重	500g/m²
Pile Height/绒高	3.5-5.5mm
Total Thickness/厚度	Approx 7mm
Tile Size/尺寸	250mmx1000mm
Nbs Smoke 烟密度	(ASTM E 662)less than 450
Flooring Radiant Panel 临界热辐射通量	Class(Mean average CRF: 0.45 watts/cm² orhigher) ASTM E-648
Electrostatic Propensity 静电倾向	3.0kV or lower AATCC 134
Colourfastness to Light 耐光色牢度	≥4 after 100 hours AATCC 16E

PRODUCT NOTES:

1. Product specifications are derived from averages resulting from normal manufacturing tolerances in yarn, fiber, temperature, humidity and colour. Product specifications may vary within normal industry and standardised testing tolerances.
2. These specifications reflect mean averages based upon tests of production runs of this carpet style by independent laboratories. A range of variances is implicit in the testing process. Furthermore, the standard test methods established to derive the specifications lack a degree of precision and repeatability; therefore, individual test results on the actual carpet purchased may differ from the specifications above.
3. Colours may vary slightly from dye lot to dye lot.
4. Backing or other materials may be changed without prior notice when shortages occur or when technological advancements become available which provit for improvement of the product's performance.
5. All products are 100% recyclable.



053121+053122+053123



053121+053122+053123



053122+053123+053131



053111+053122



053111+053123



053121+053122



053121+053123+053131



053123+053121+053122



053123+053122+053121



053123+053122



INSTALLATION INSTRUCTIONS:



Herringbone



Gingham



Ashlar

PRODUCT INFORMATION

0531 SERIES

Construction/结构	Multi-level Loop
Fiber/纤维	Blended Nylon
Dye method/染色工艺	100% solution dyed
Backing/底背	可回收环保PE软底
Tufting Gauge/针密	47.00 rows per 10cm
Pile Weight/绒重	500g/m ²
Pile Height/绒高	3.5-5.5mm
Total Thickness/厚度	Approx 7mm
Tile Size/尺寸	250mmx1000mm
Nbs Smoke 烟密度	(ASTM E 662)less than 450
Flooring Radiant Panel 临界热辐射通量	Class(Mean average CRF: 0.45 watts/cm ² orhigher) ASTM E-648
Electrostatic Propensity 静电倾向	3.0kV or lower AATCC 134
Colourfastness to Light 耐光色牢度	≥4 after 100 hours AATCC 16E

PRODUCT NOTES:

1. Product specifications are derived from averages resulting from normal manufacturing tolerances in yarn, fiber, temperature, humidity and colour. Product specifications may vary within normal industry and standardised testing tolerances.
2. These specifications reflect mean averages based upon tests of production runs of this carpet style by independent laboratories. A range of variances is implicit in the testing process. Furthermore, the standard test methods established to derive the specifications lack a degree of precision and repeatability; therefore, individual test results on the actual carpet purchased may differ from the specifications above.
3. Colours may vary slightly from dye lot to dye lot.
4. Backing or other materials may be changed without prior notice when shortages occur or when technological advancements become available which provit for improvement of the product's performance.
5. All products are 100% recyclable.



037121+037122



037121



037121+037131





037121+037122




037111+037121



037121



037121+037122+037111

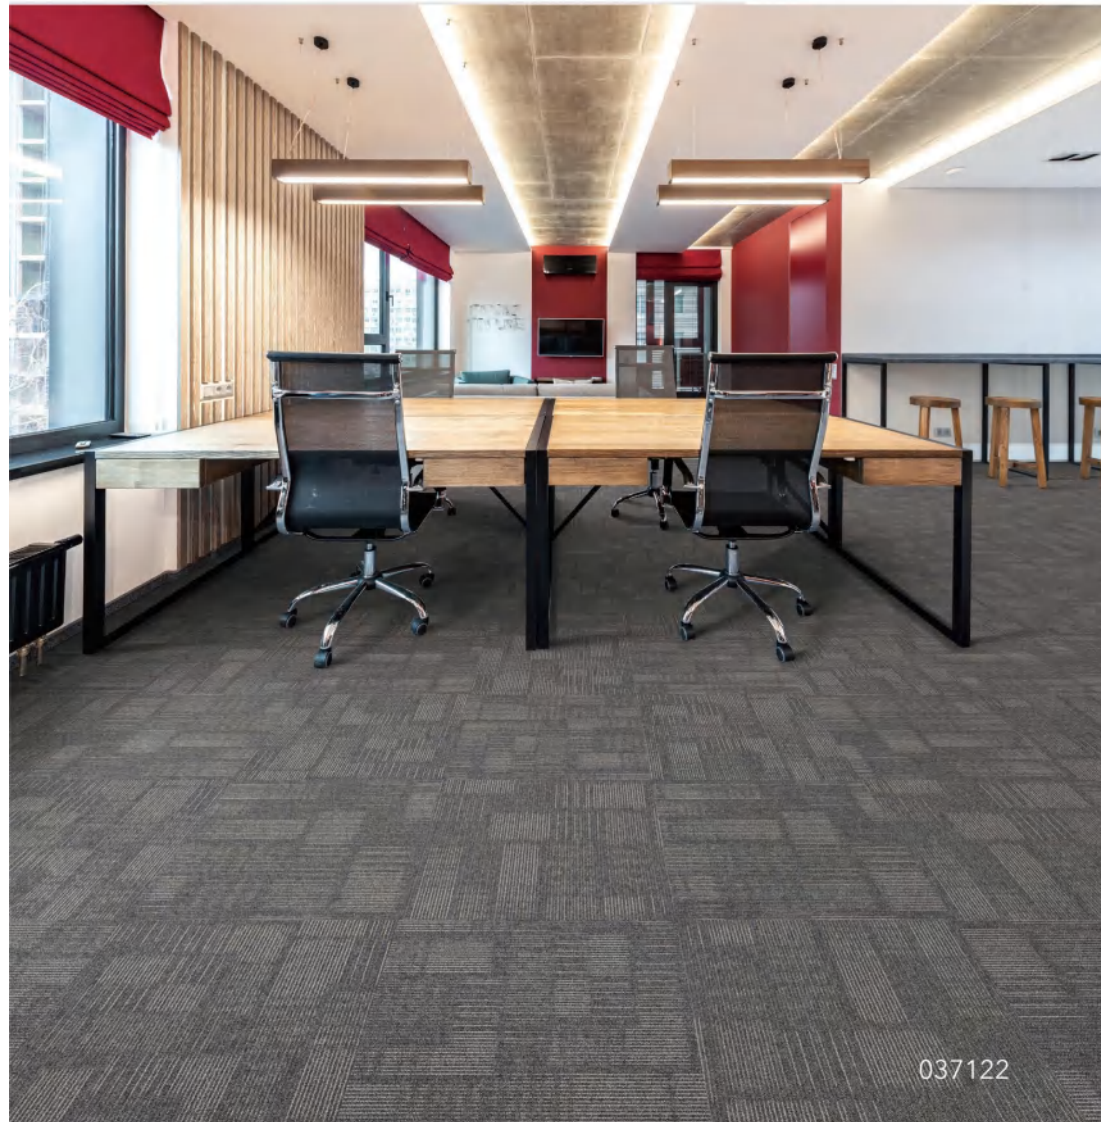

037122



037122+037131



037111



037121




037122



037131

INSTALLATION INSTRUCTIONS:



PRODUCT INFORMATION

0371 SERIES

Construction/结构	Multi-level Loop
Fiber/纤维	Blended Nylon
Dye method/染色工艺	100% solution dyed
Backing/底背	可回收环保PE软底
Tufting Gauge/针密	47.00 rows per 10cm
Pile Weight/绒重	500g/m ²
Pile Height/绒高	3.5-5.5mm
Total Thickness/厚度	Approx 7mm
Tile Size/尺寸	500mmx500mm
Nbs Smoke 烟密度	(ASTM E 662)less than 450
Flooring Radiant Panel 临界热辐射通量	Class(Mean average CRF: 0.45 watts/cm ² orhigher) ASTM E-648
Electrostatic Propensity 静电倾向	3.0kV or lower AATCC 134
Colourfastness to Light 耐光色牢度	≥4 after 100 hours AATCC 16E

PRODUCT NOTES:

1. Product specifications are derived from averages resulting from normal manufacturing tolerances in yarn, fiber, temperature, humidity and colour. Product specifications may vary within normal industry and standardised testing tolerances.
2. These specifications reflect mean averages based upon tests of production runs of this carpet style by independent laboratories. A range of variances is implicit in the testing process. Furthermore, the standard test methods established to derive the specifications lack a degree of precision and repeatability; therefore, individual test results on the actual carpet purchased may differ from the specifications above.
3. Colours may vary slightly from dye lot to dye lot.
4. Backing or other materials may be changed without prior notice when shortages occur or when technological advancements become available which provit for improvement of the product's performance.
5. All products are 100% recyclable.



GET IN TOUCH

Head Office

Sharjah, United Arab Emirates

WhatsApp / Call

+971 50 200 8322

Email

info@fineflooringdecor.com

Website

www.fineflooringdecor.com

Premium Flooring Solutions for Luxury Interiors

© 2026 FINE FLOORING AND DECOR WORKS. ALL RIGHTS RESERVED.